

Light efficiency:

102 Lumen/Watt

Light quality:

CRI: 82.9

Color temperature:

3000 K

Output: 4080 lm

Peak: 2583 cd


Power: 39.9 W

PF: 0.98



BETA-6R-SW-45LM-30K-80-75D-NL-WH-WH

Date and time:  
1/27/2025 10:00:26 AM

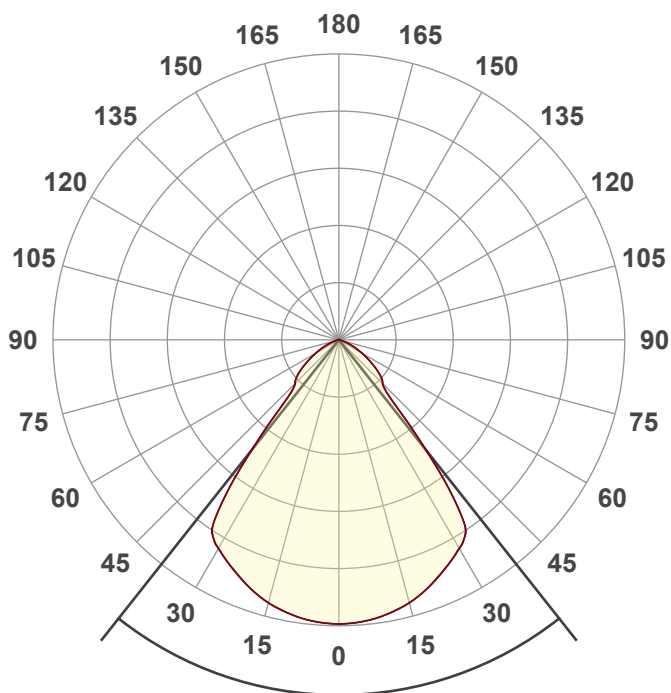


Beam angle

76.7°






CIE 1931  
x: 0.440  
y: 0.410

Spectra

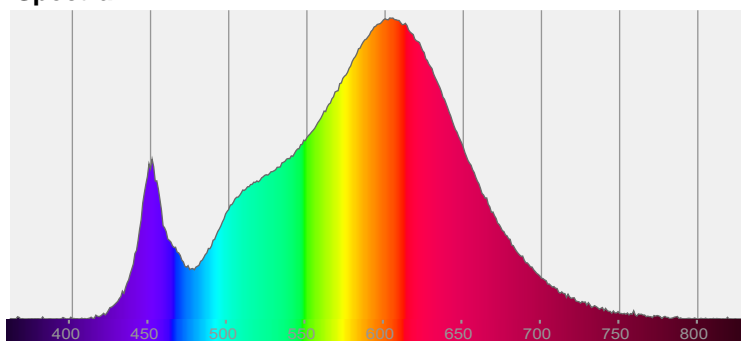


Power

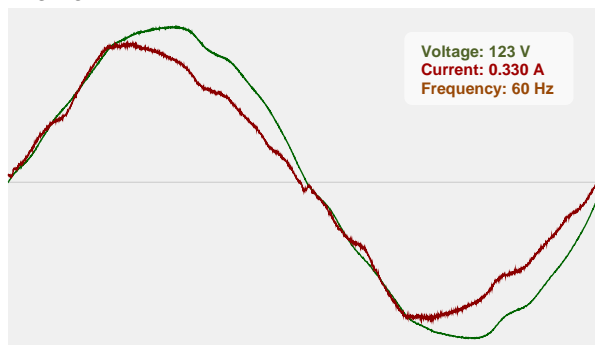


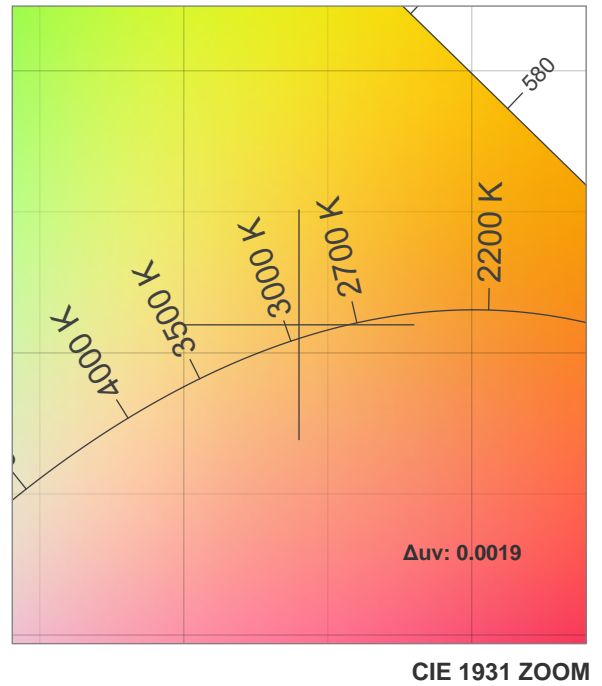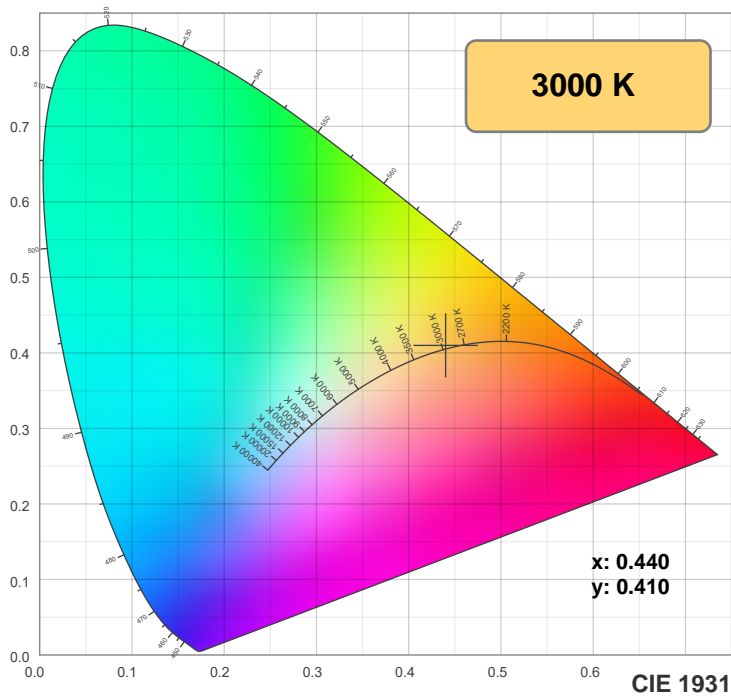

TM30: 85.9

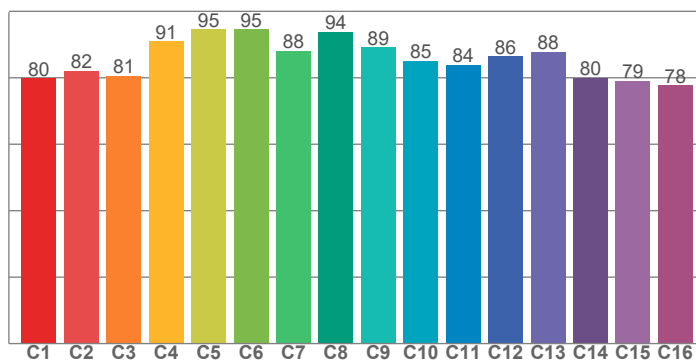

CRI: 82.9 (R1-R8)

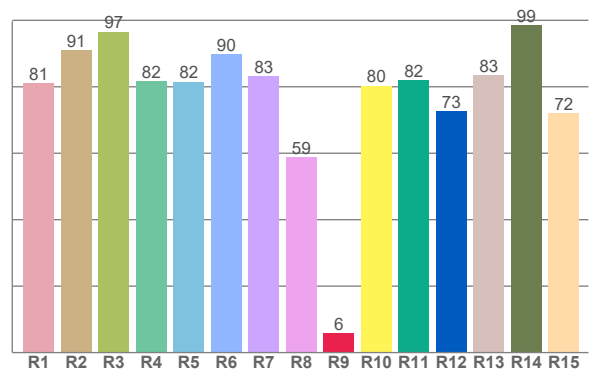

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
81.0	91.0	96.6	81.7	81.5	89.8	83.1	58.7	5.7	80.3	82.0	72.7	83.4	98.6	72.1


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
79.8	82.1	80.6	90.9	94.5	94.6	88.0	93.8	89.2	85.0	83.9	86.4	87.8	79.9	79.1	77.7

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
77.4	94.5	85.4	82.6	84.4	84.6	84.7	88.1	94.9	91.5	88.4	85.3	83.2	70.6	73.0

CQS: 83.0

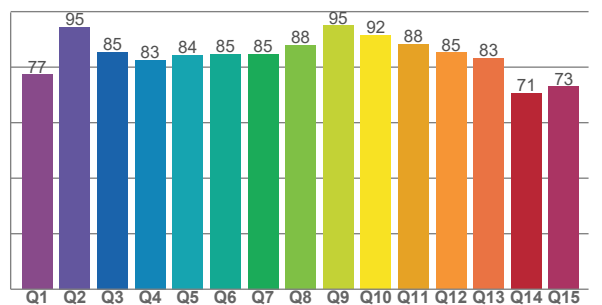

## Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	$\Delta uv$
3000 K	82.9	5.7	85.9	95.1	83.0	0.440	0.410	0.250	0.349	0.0019







**Rf 85.9**


Fidelity index Rf

**Rg 95.1**

Gamut index Rg

Hue Bin	R <sub>f</sub>	Graphic shifts (%)	
		Chroma	Hue
1	80	-11%	0%
2	82	-8%	6%
3	81	-4%	10%
4	91	-1%	5%
5	95	1%	3%
6	95	1%	-2%
7	88	-5%	-6%
8	94	-3%	0%
9	89	-6%	3%
10	85	-4%	9%
11	84	0%	12%
12	86	6%	2%
13	88	4%	-8%
14	80	4%	-16%
15	79	-3%	-13%
16	78	-8%	-15%

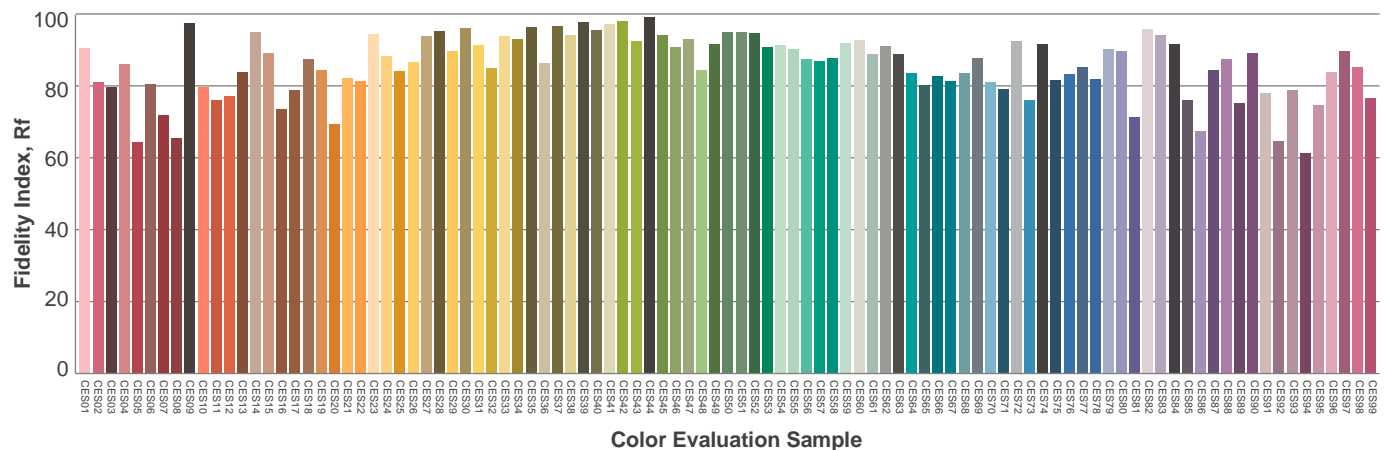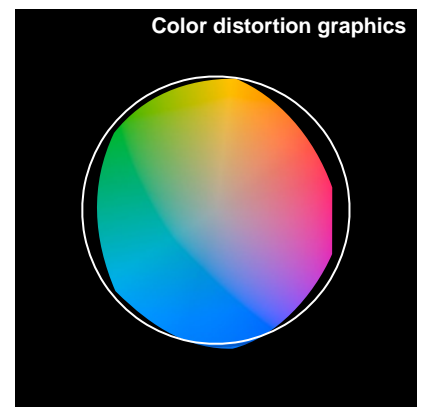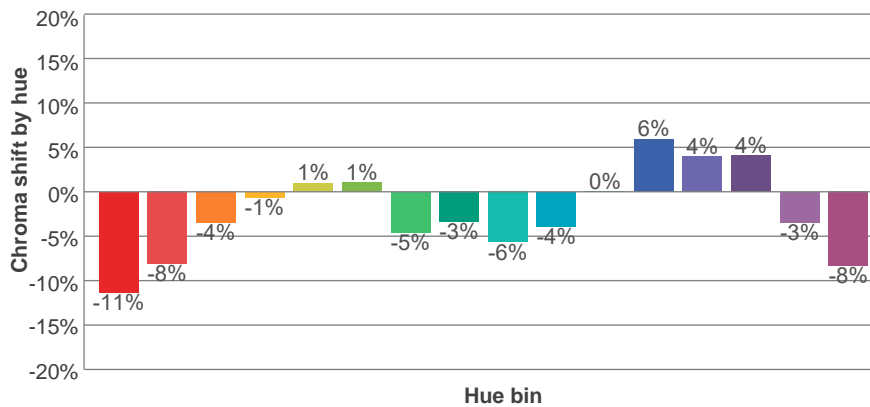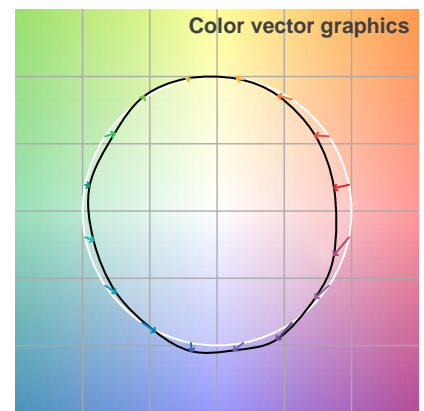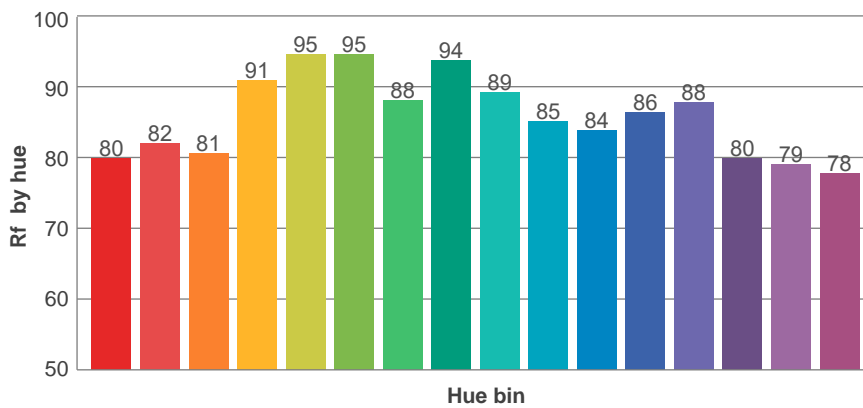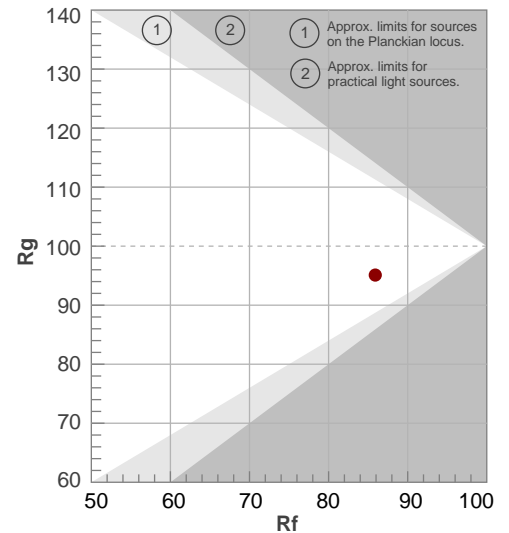

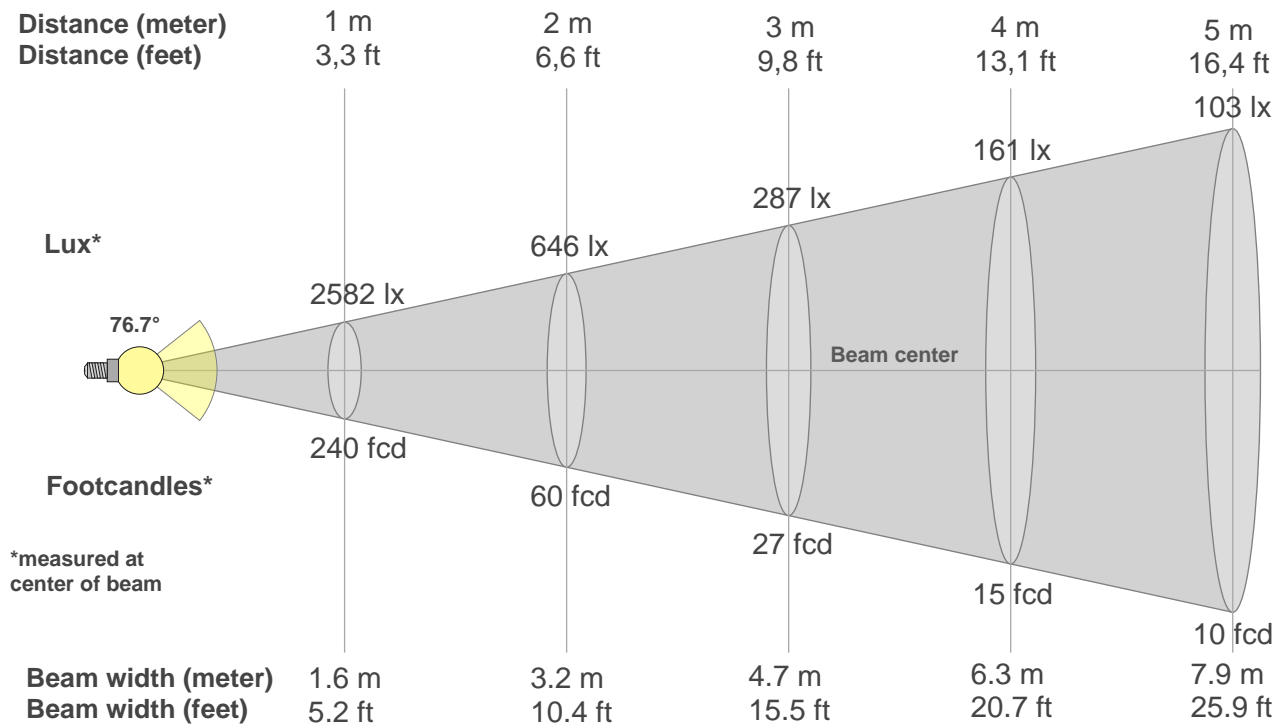

#### Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
2582lx	646lx	287lx	161lx	103lx	72lx	53lx	40lx	32lx	26lx	21lx	18lx	15lx	13lx	11lx	10lx	9lx	8lx	7lx	6lx
239.9fc	60fcd	26.7fcd	15fcd	9.6fcd	6.7fcd	4.9fcd	3.7fcd	3fcd	2.4fcd	2fcd	1.7fcd	1.4fcd	1.2fcd	1.1fcd	0.9fcd	0.8fcd	0.7fcd	0.7fcd	0.6fcd

#### Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
2582	2569	2531	2475	2391	2292	2189	1914	973	569	482	358	245	151	77	29	13	5	0	0
100%	99%	98%	96%	93%	89%	85%	74%	38%	22%	19%	14%	9%	6%	3%	1%	0%	0%	0%	0%

#### Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
2582	2567	2530	2473	2388	2288	2185	1909	962	565	477	355	241	149	76	28	13	5	0	0
100%	99%	98%	96%	92%	89%	85%	74%	37%	22%	18%	14%	9%	6%	3%	1%	1%	0%	0%	0%

#### Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
2582	2569	2531	2475	2391	2292	2189	1914	973	569	482	358	245	151	77	29	13	5	0	0
100%	99%	98%	96%	93%	89%	85%	74%	38%	22%	19%	14%	9%	6%	3%	1%	0%	0%	0%	0%

#### Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
2582	2567	2530	2473	2388	2288	2185	1909	962	565	477	355	241	149	76	28	13	5	0	0
100%	99%	98%	96%	92%	89%	85%	74%	37%	22%	18%	14%	9%	6%	3%	1%	1%	0%	0%	0%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
76.7°	118.5°	142.1°	95.2%	82.2%