

Light efficiency:

75 Lumen/Watt

Light quality:

CRI: 82.5

Color temperature:

3068 K

Output: 965 lm

Peak: 1913 cd


Power: 12.9 W

PF: 0.94



NU1-RA-SW-13LM-30K-80-40D-HETA-
NL-WH-WH

Date and time:
8/20/2024 9:48:04 AM

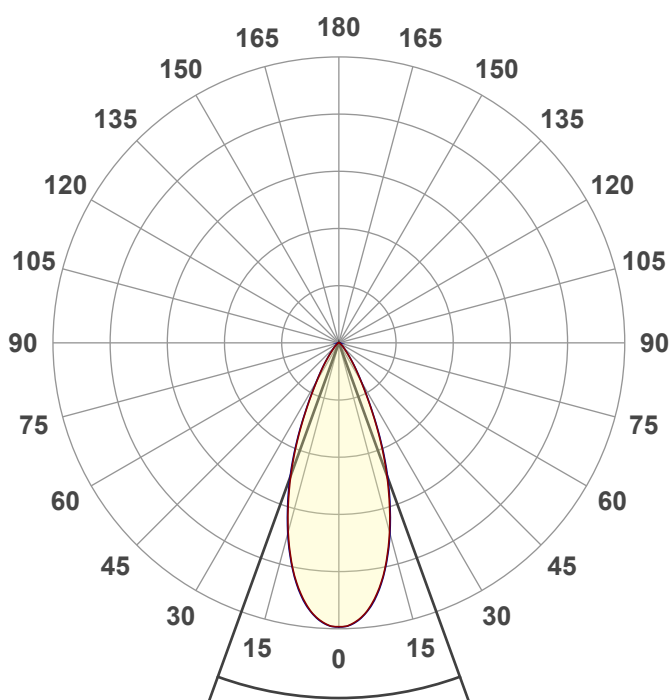


Beam angle

39.9°






CIE 1931
x: 0.434
y: 0.406

Spectra

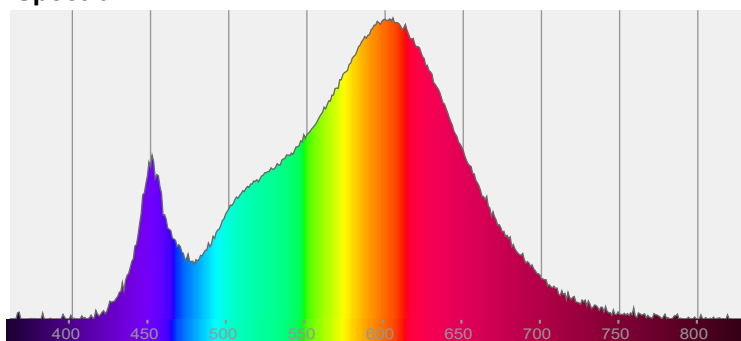


Power

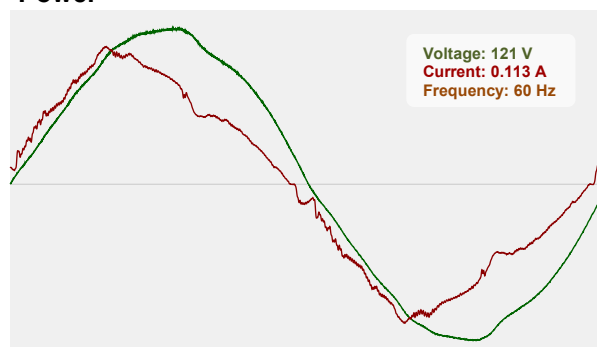


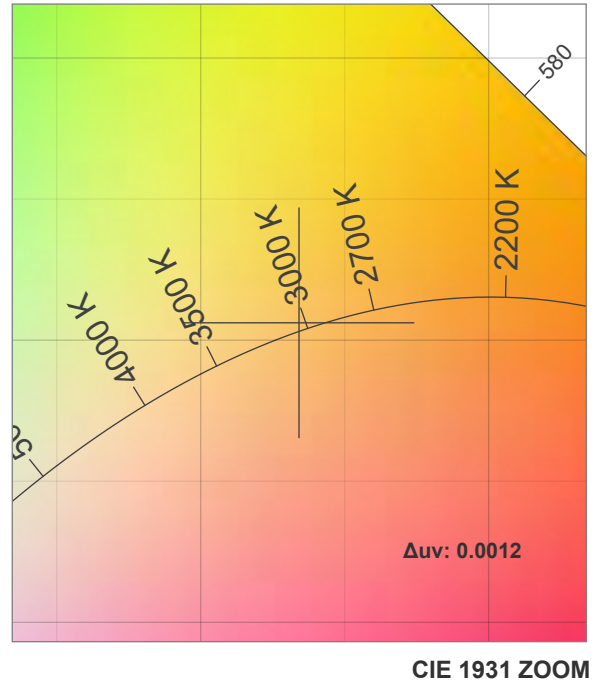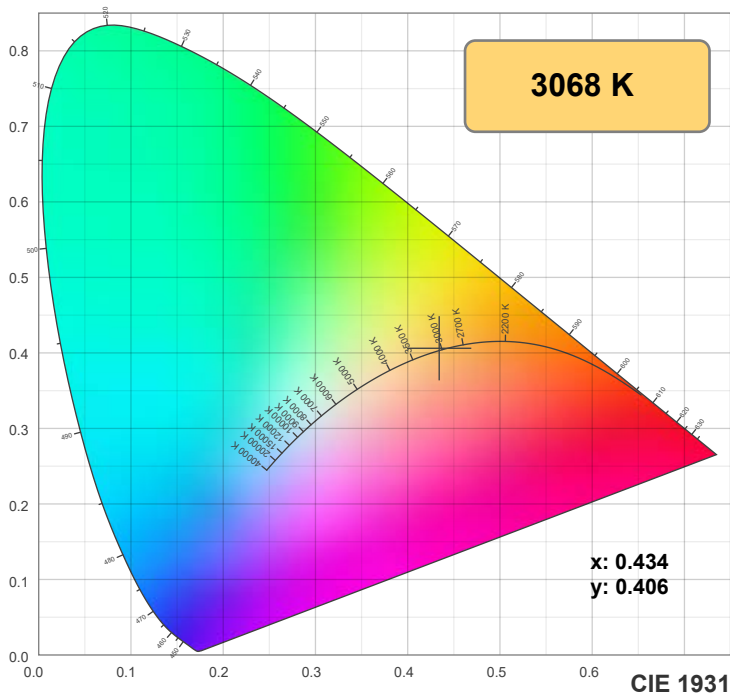

TM30: 85.5

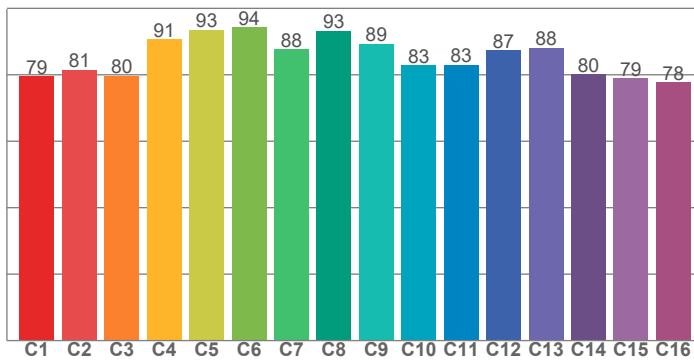

CRI: 82.5 (R1-R8)

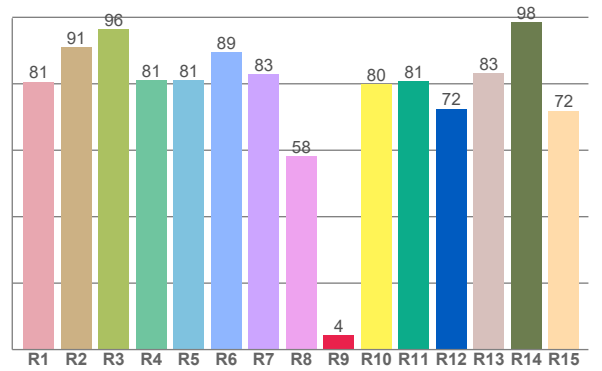

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
80.6	90.9	96.3	81.0	81.1	89.4	82.8	58.3	4.2	79.9	80.8	72.5	83.1	98.5	71.9


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
79.5	81.5	79.7	90.7	93.5	94.3	87.7	93.2	89.3	82.9	83.1	87.3	88.1	80.1	78.9	77.7

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
77.3	94.9	84.6	81.3	83.5	83.9	84.0	87.3	95.1	90.8	87.4	84.3	82.4	70.1	72.6

CQS: 82.4

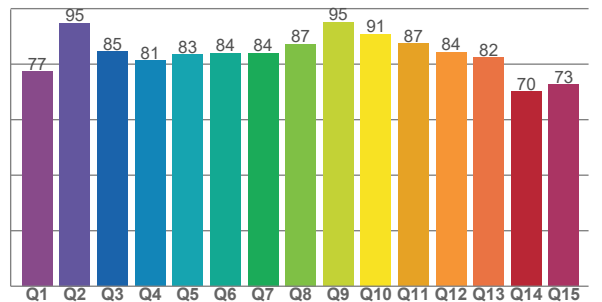

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3068 K	82.5	4.2	85.5	95.2	82.4	0.434	0.406	0.248	0.348	0.0012







Rf 85.5


Fidelity index Rf

Rg 95.2

Gamut index Rg

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	79	-12%	0%
2	81	-8%	7%
3	80	-3%	10%
4	91	0%	6%
5	93	0%	3%
6	94	1%	-2%
7	88	-5%	-6%
8	93	-4%	0%
9	89	-6%	4%
10	83	-4%	9%
11	83	0%	11%
12	87	7%	1%
13	88	4%	-7%
14	80	4%	-16%
15	79	-3%	-13%
16	78	-9%	-15%

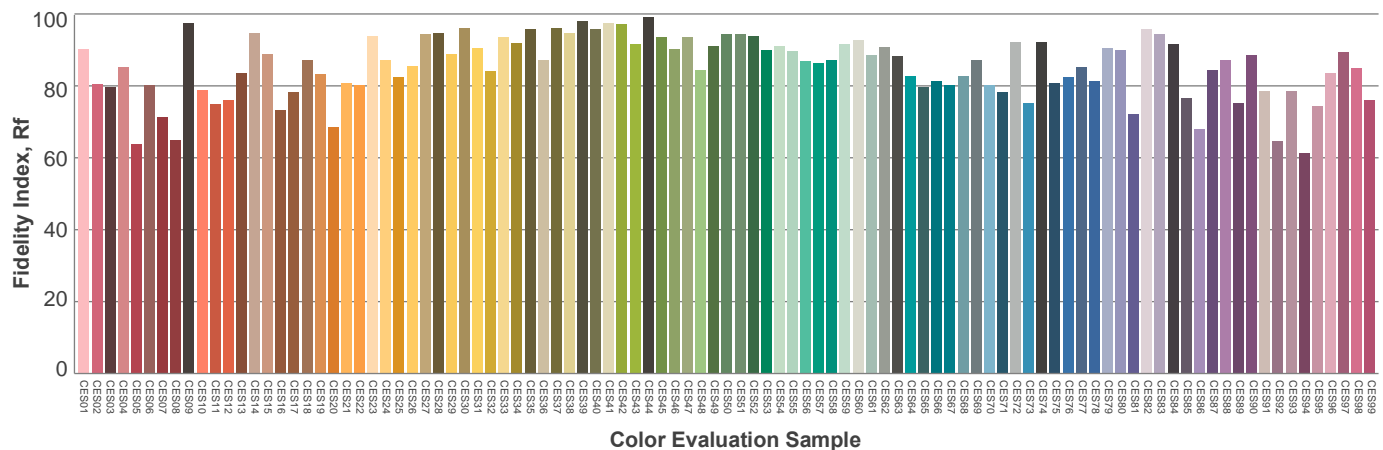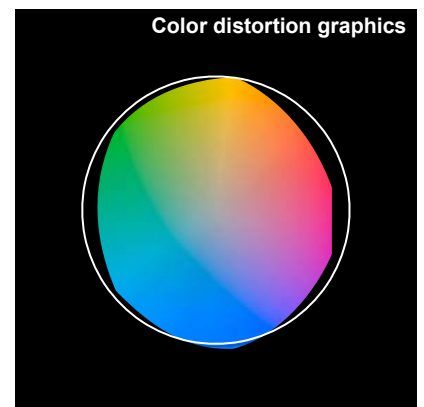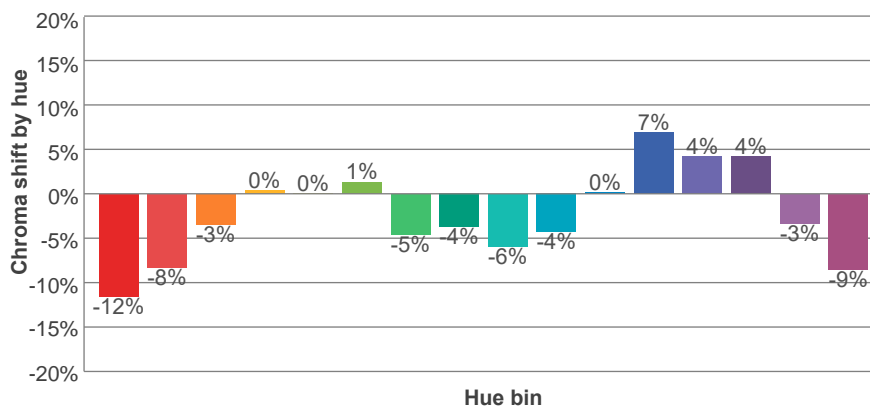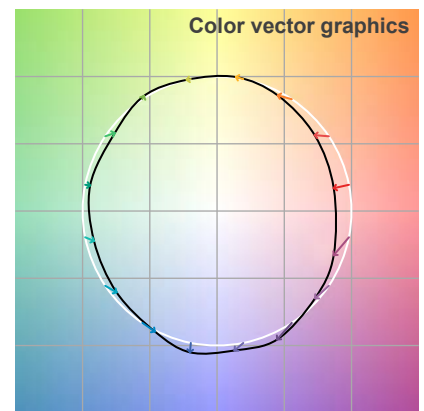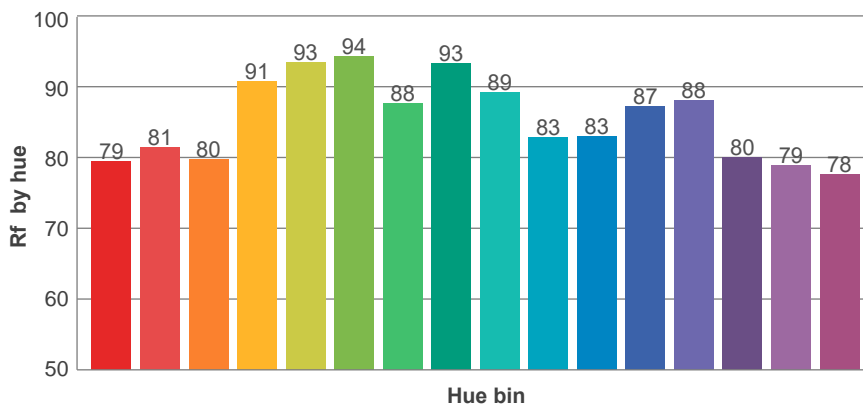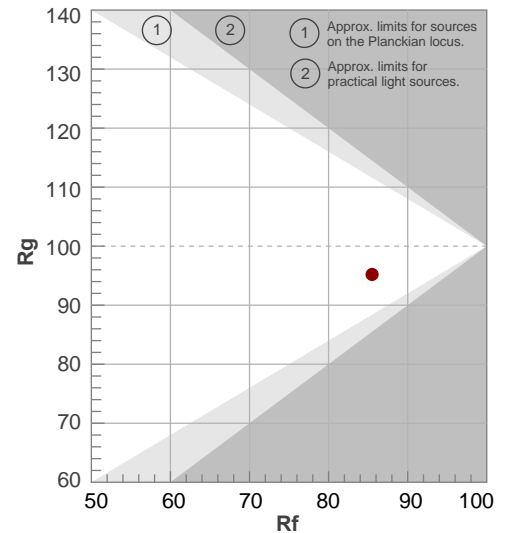

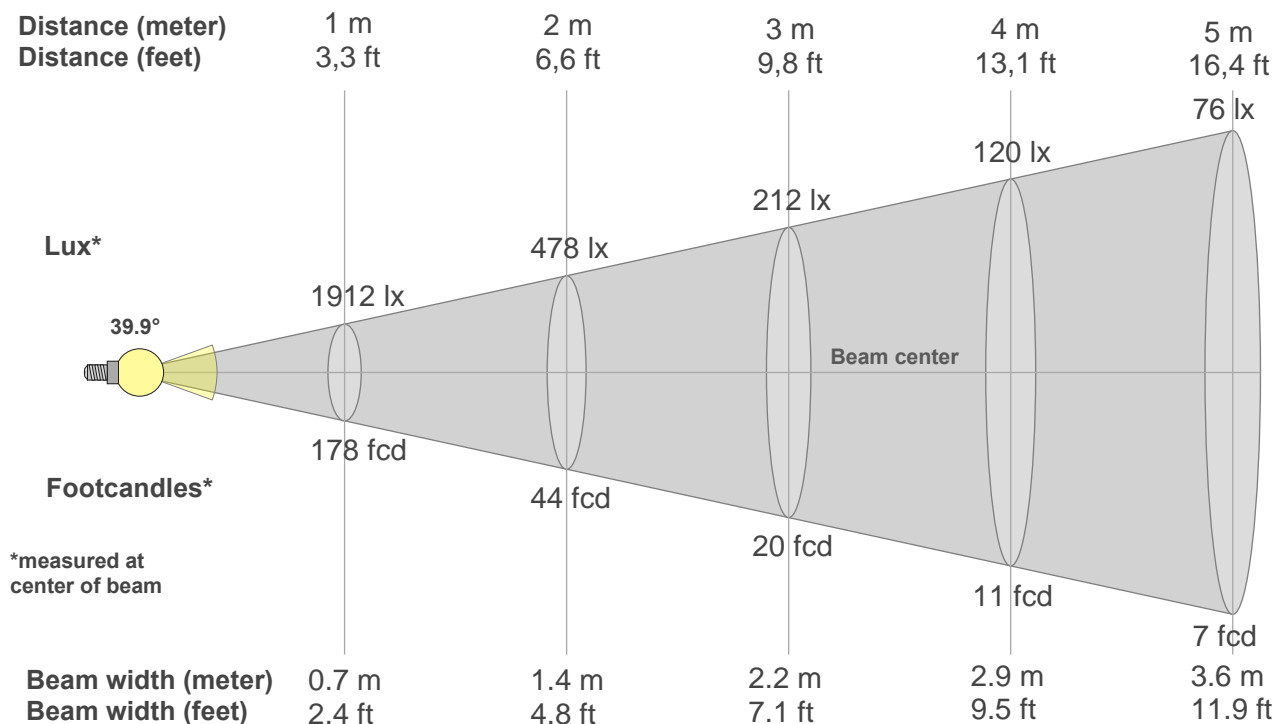

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
1912lx	478lx	212lx	120lx	76lx	53lx	39lx	30lx	24lx	19lx	16lx	13lx	11lx	10lx	8lx	7lx	7lx	6lx	5lx	5lx
177.6fcd	44.4fcd	19.7fcd	11.1fcd	7.1fcd	4.9fcd	3.6fcd	2.8fcd	2.2fcd	1.8fcd	1.5fcd	1.2fcd	1.1fcd	0.9fcd	0.8fcd	0.7fcd	0.6fcd	0.5fcd	0.5fcd	0.4fcd

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1912	1900	1867	1813	1733	1637	1519	1386	1243	1093	941	789	638	500	386	294	230	178	135	103
100%	99%	98%	95%	91%	86%	79%	73%	65%	57%	49%	41%	33%	26%	20%	15%	12%	9%	7%	5%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1912	1902	1871	1817	1741	1644	1526	1397	1255	1108	959	806	654	512	396	305	238	185	141	107
100%	99%	98%	95%	91%	86%	80%	73%	66%	58%	50%	42%	34%	27%	21%	16%	12%	10%	7%	6%

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1912	1900	1867	1813	1733	1637	1519	1386	1243	1093	941	789	638	500	386	294	230	178	135	103
100%	99%	98%	95%	91%	86%	79%	73%	65%	57%	49%	41%	33%	26%	20%	15%	12%	9%	7%	5%

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1912	1902	1871	1817	1741	1644	1526	1397	1255	1108	959	806	654	512	396	305	238	185	141	107
100%	99%	98%	95%	91%	86%	80%	73%	66%	58%	50%	42%	34%	27%	21%	16%	12%	10%	7%	6%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
39.9°	67.2°	88.8°	98.5%	95.4%