

Light efficiency:

40 Lumen/Watt

Light quality:

CRI: 96.3

Color temperature:

3042 K

Output: 478 lm

Peak: 1121 cd

Power: 11.8 W


PF: 0.94



NU1-RA-WD-07LM-3018-97-40D-NA-CL-WH-WH


Date and time:

9/3/2024 3:57:39 PM

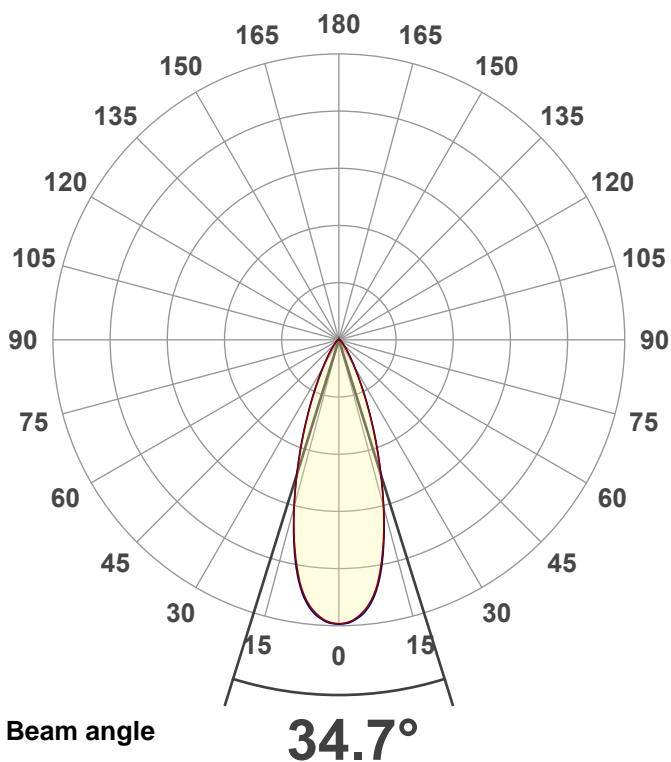




CIE 1931
x: 0.431
y: 0.396

Spectra

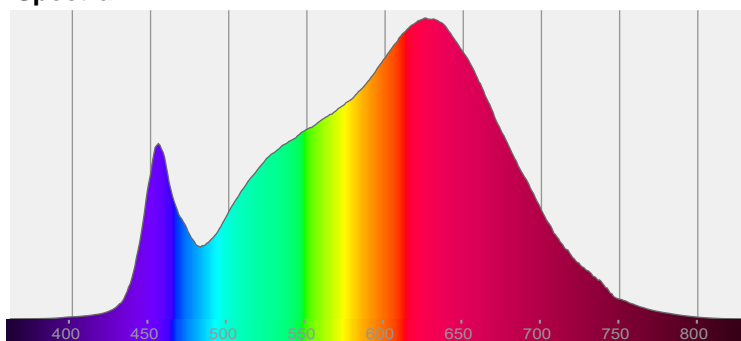


Power

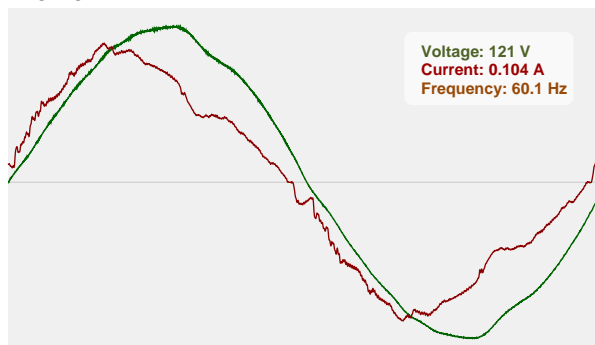


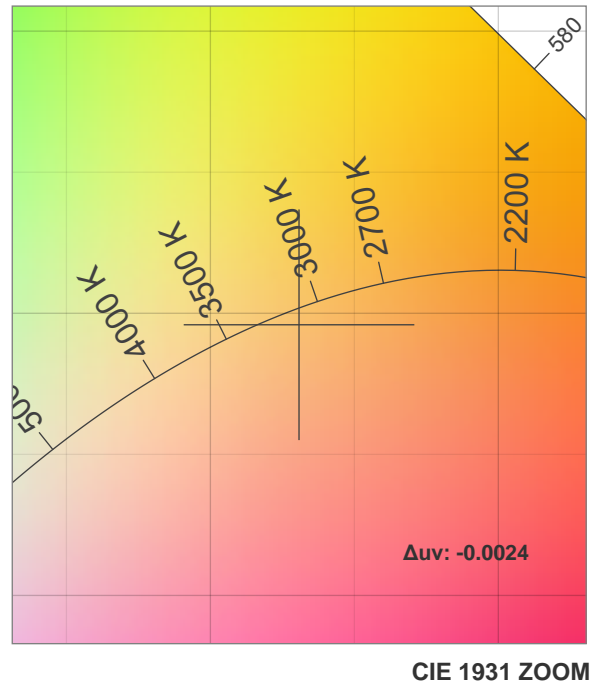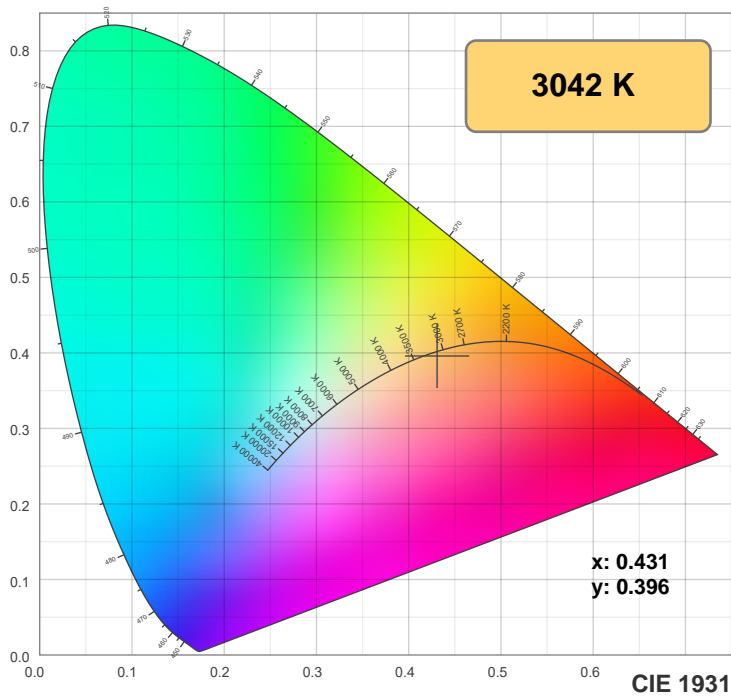


TM30: 92.6

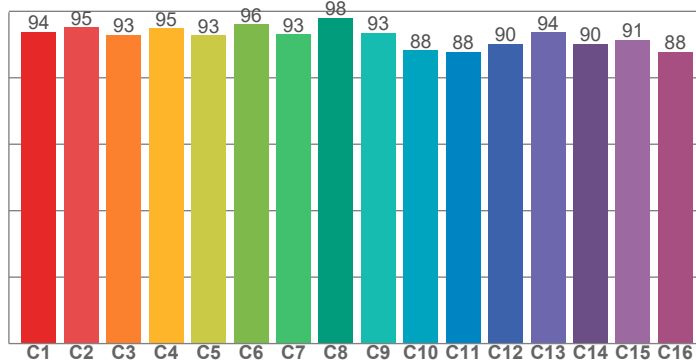

CRI: 96.3 (R1-R8)

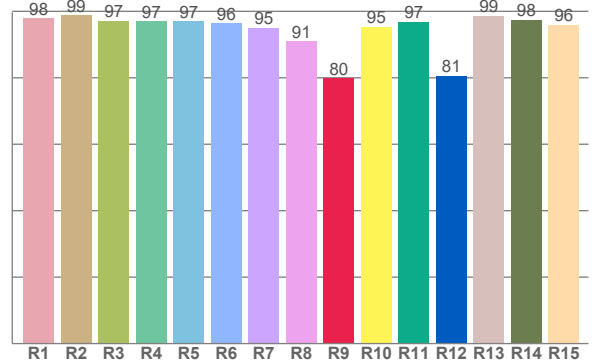

CQS: 92.6

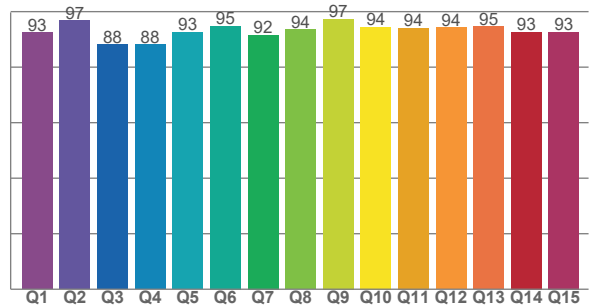

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
98.0	98.8	97.2	96.9	97.1	96.4	95.0	90.9	79.9	95.4	96.8	80.6	98.7	97.5	96.0

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
93.9	95.2	93.0	94.9	92.7	96.0	93.1	98.1	93.5	88.2	87.7	90.3	93.7	90.2	91.3	87.7

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
92.5	96.7	88.2	88.1	92.5	94.8	91.6	93.5	97.4	94.4	94.1	94.3	94.7	92.7	92.6

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3042 K	96.3	79.9	92.6	100.7	92.6	0.431	0.396	0.250	0.345	-0.0024






Rf 92.6


Fidelity index Rf

Rg 100.7

Gammut index Rg

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	94	-3%	1%
2	95	-2%	1%
3	93	0%	3%
4	95	-1%	1%
5	93	-3%	2%
6	96	2%	0%
7	93	-2%	1%
8	98	0%	0%
9	93	-1%	4%
10	88	0%	7%
11	88	3%	9%
12	90	5%	2%
13	94	3%	-3%
14	90	5%	-6%
15	91	0%	-4%
16	88	1%	-10%

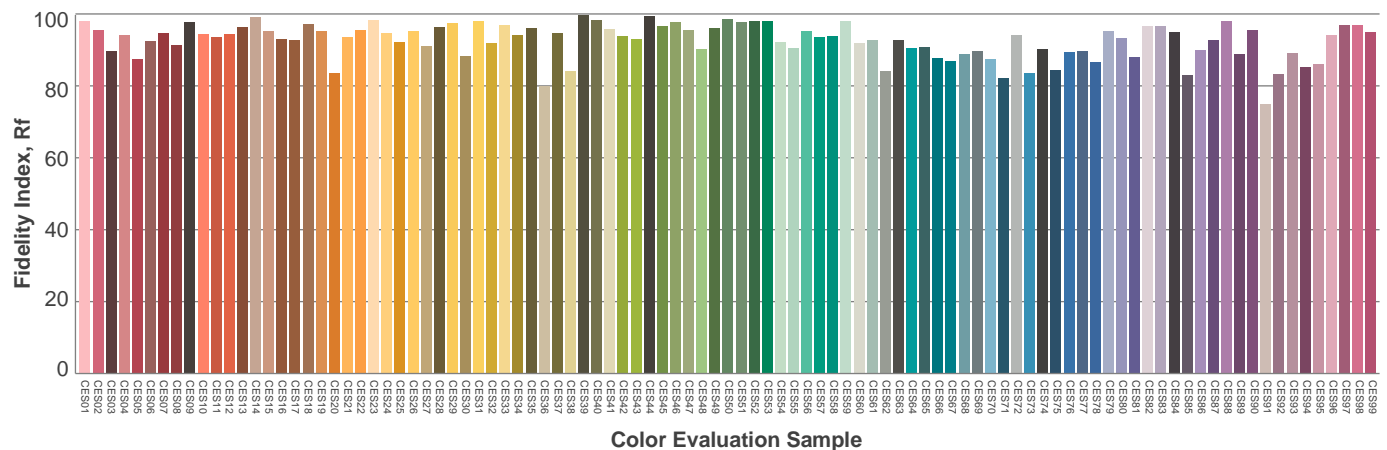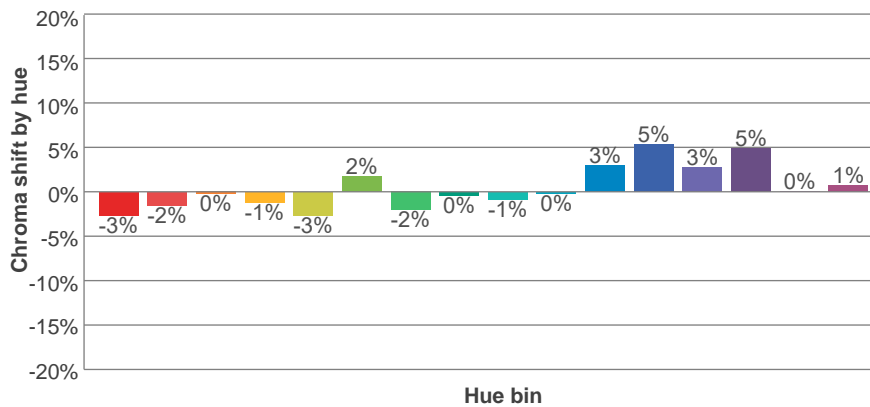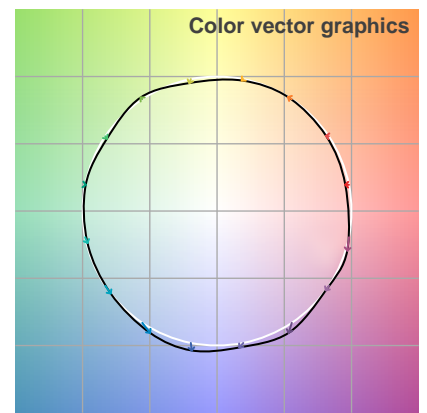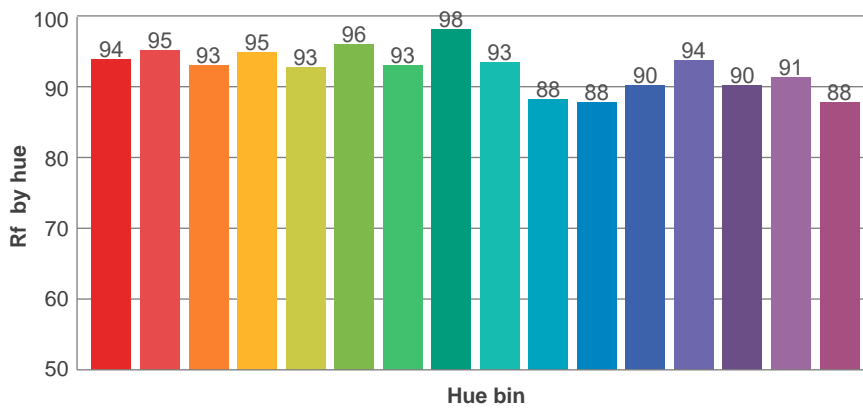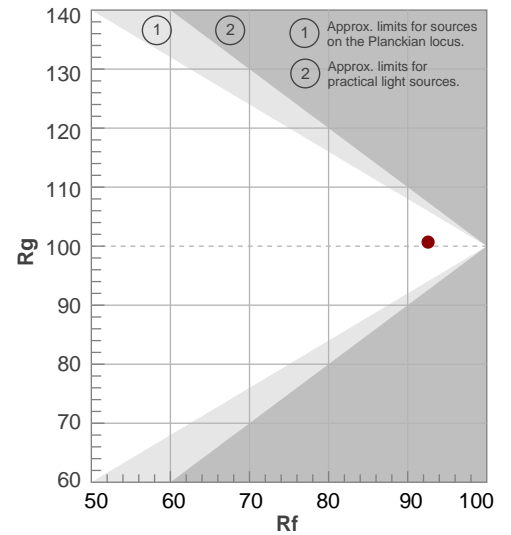

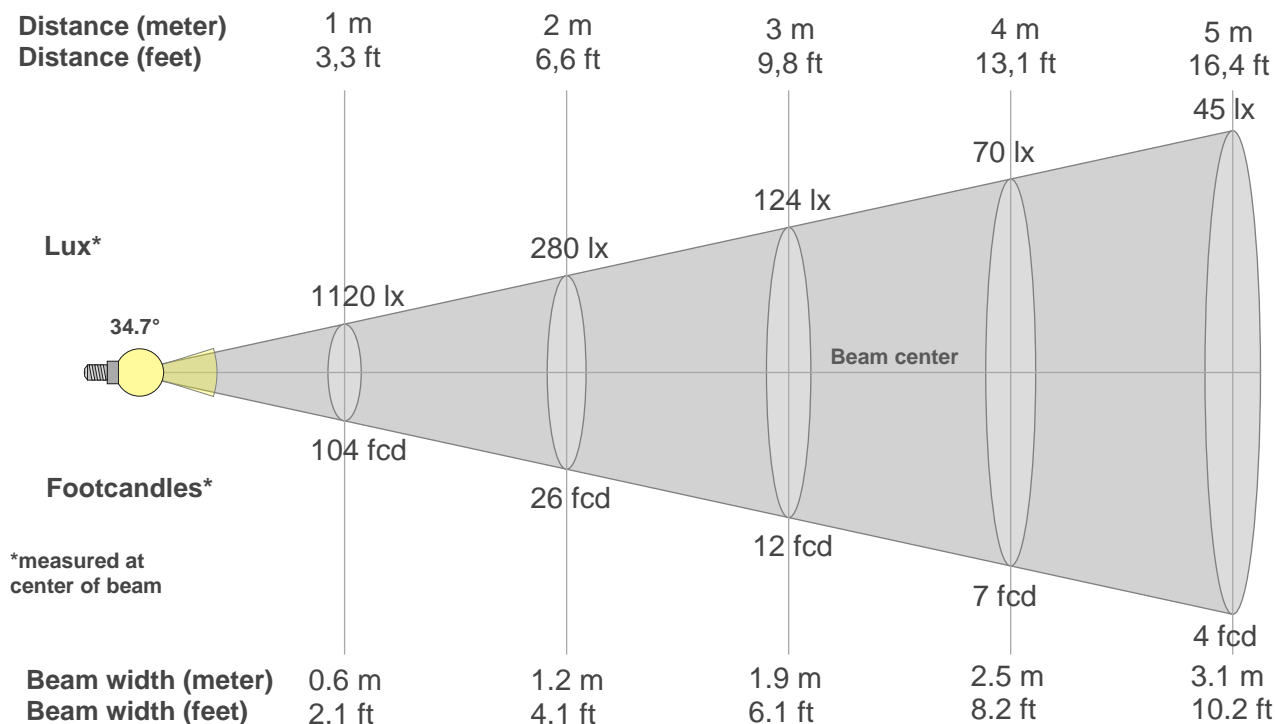

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
1120lx	280lx	124lx	70lx	45lx	31lx	23lx	18lx	14lx	11lx	9lx	8lx	7lx	6lx	5lx	4lx	4lx	3lx	3lx	3lx
104.1fcd	26fcd	11.6fcd	6.5fcd	4.2fcd	2.9fcd	2.1fcd	1.6fcd	1.3fcd	1fcd	0.9fcd	0.7fcd	0.6fcd	0.5fcd	0.5fcd	0.4fcd	0.4fcd	0.3fcd	0.3fcd	0.3fcd

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1120	1112	1093	1060	1006	930	836	733	626	520	423	338	265	204	157	121	95	76	61	48
100%	99%	98%	95%	90%	83%	75%	65%	56%	46%	38%	30%	24%	18%	14%	11%	8%	7%	5%	4%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1120	1116	1098	1066	1016	940	844	737	629	524	430	344	272	212	163	125	97	76	60	48
100%	100%	98%	95%	91%	84%	75%	66%	56%	47%	38%	31%	24%	19%	15%	11%	9%	7%	5%	4%

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1120	1112	1093	1060	1006	930	836	733	626	520	423	338	265	204	157	121	95	76	61	48
100%	99%	98%	95%	90%	83%	75%	65%	56%	46%	38%	30%	24%	18%	14%	11%	8%	7%	5%	4%

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1120	1116	1098	1066	1016	940	844	737	629	524	430	344	272	212	163	125	97	76	60	48
100%	100%	98%	95%	91%	84%	75%	66%	56%	47%	38%	31%	24%	19%	15%	11%	9%	7%	5%	4%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
34.7°	61.3°	85°	97.7%	94.0%