

Light efficiency:

77 Lumen/Watt

Light quality:

CRI: 81.0

Color temperature:

3071 K

Output: 3122 lm

Peak: 5776 cd


Power: 40.7 W

PF: 0.98



NU3-RD-SW-40LM-30K-80-40D-CL-WH-WH

Date and time:
11/9/2020 1:16:21 PM

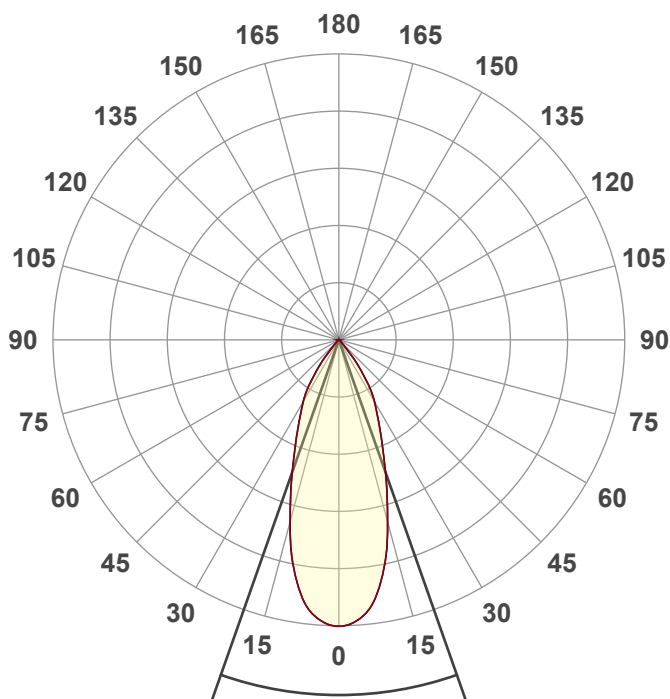


Beam angle

38.8°






CIE 1931
x: 0.433
y: 0.403

Spectra

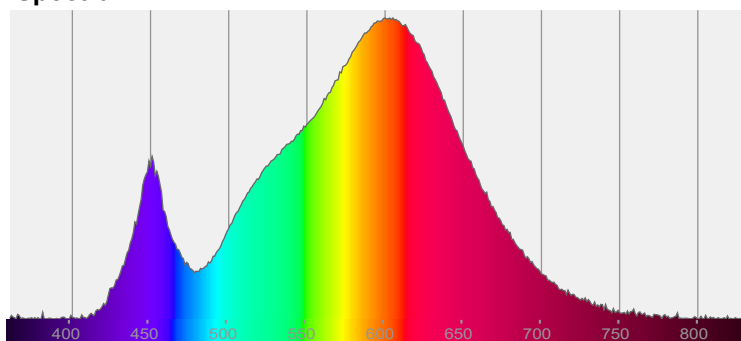


Power

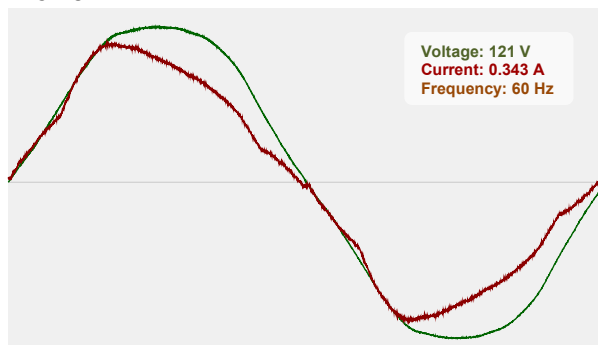


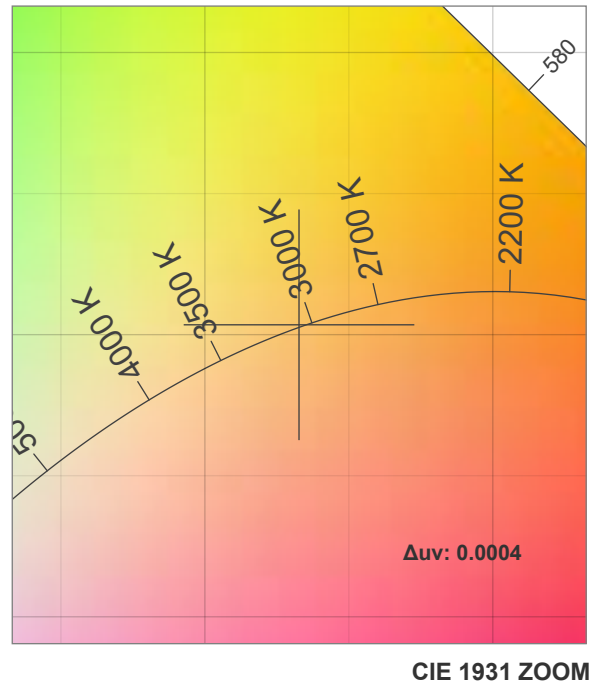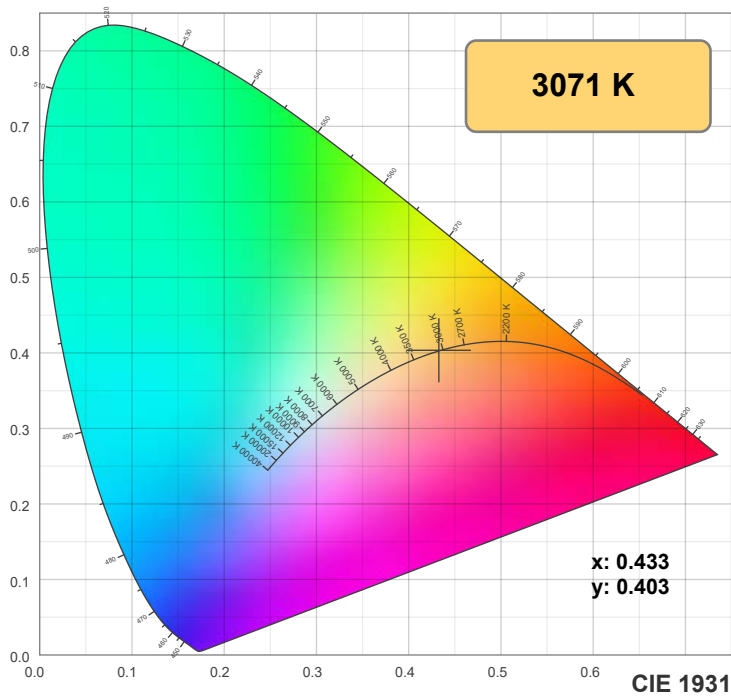

TM30: 83.1

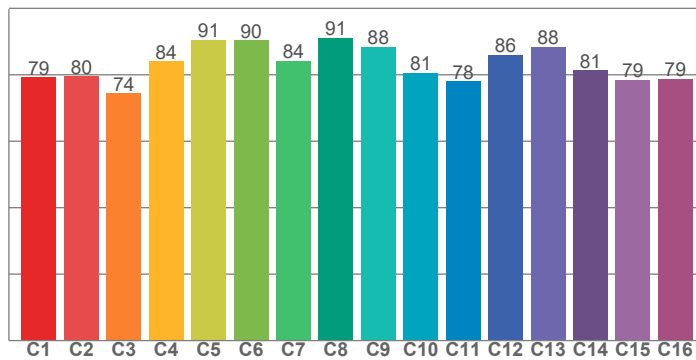

CRI: 81.0 (R1-R8)

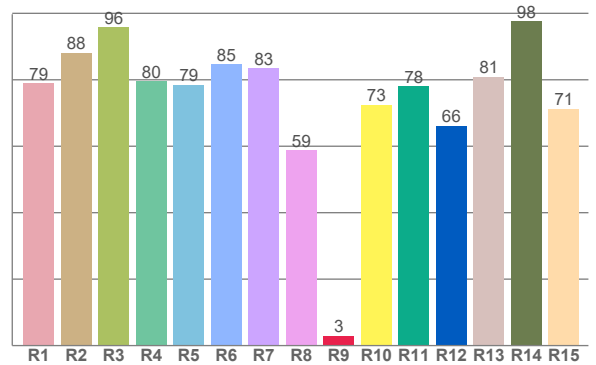

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
79.0	88.2	95.8	79.6	78.5	84.7	83.4	58.7	3.0	72.5	78.1	66.2	80.9	97.6	71.2


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
79.2	79.6	74.3	84.1	90.5	90.3	84.3	91.0	88.5	80.5	78.0	86.0	88.4	81.4	78.5	78.7

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
76.4	96.3	79.5	77.1	80.3	80.3	80.6	84.7	96.1	86.7	83.6	81.7	81.0	69.4	71.6

CQS: 80.2

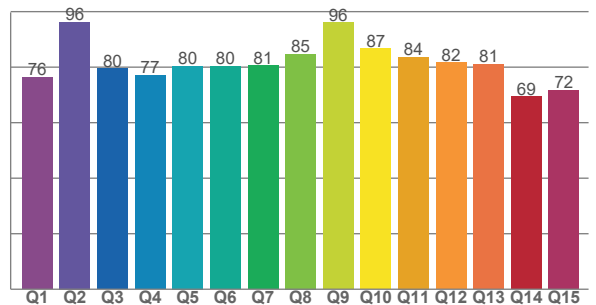

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3071 K	81.0	3.0	83.1	97.0	80.2	0.433	0.403	0.248	0.347	0.0004







Rf 83.1


Fidelity index Rf

Rg 97.0

Gamut index Rg

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	79	-12%	-2%
2	80	-9%	8%
3	74	-3%	13%
4	84	3%	10%
5	91	5%	6%
6	90	5%	-3%
7	84	-1%	-10%
8	91	-4%	-4%
9	88	-7%	1%
10	81	-7%	9%
11	78	-2%	14%
12	86	7%	5%
13	88	6%	-4%
14	81	7%	-13%
15	79	-1%	-14%
16	79	-7%	-15%

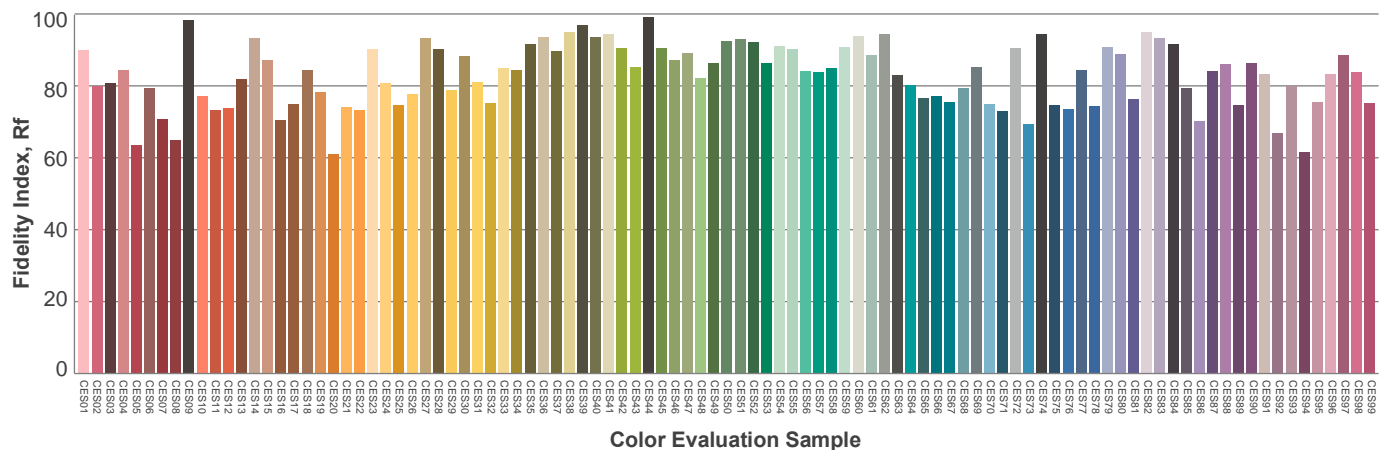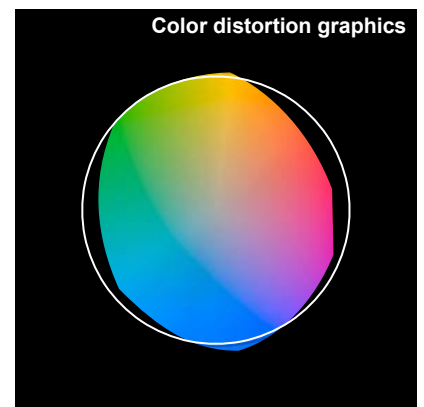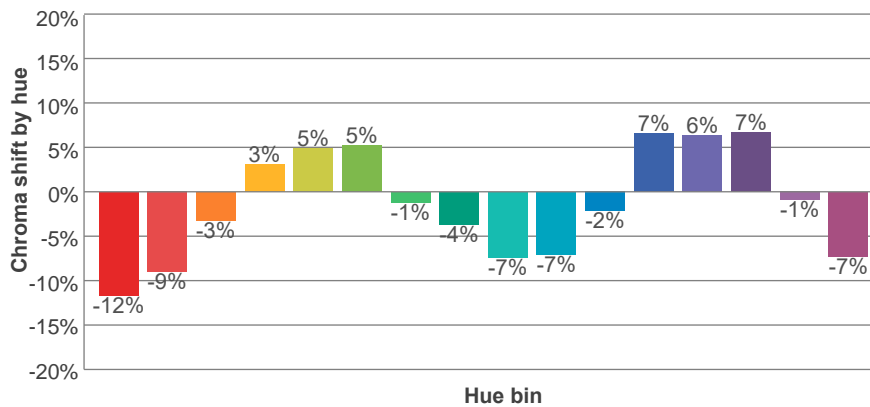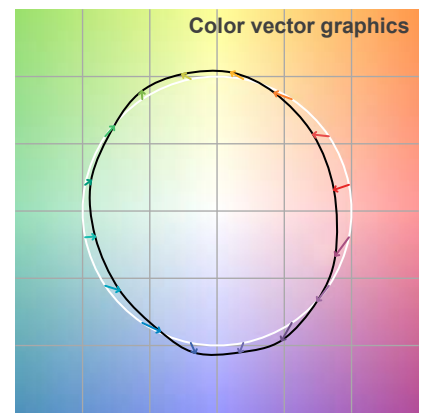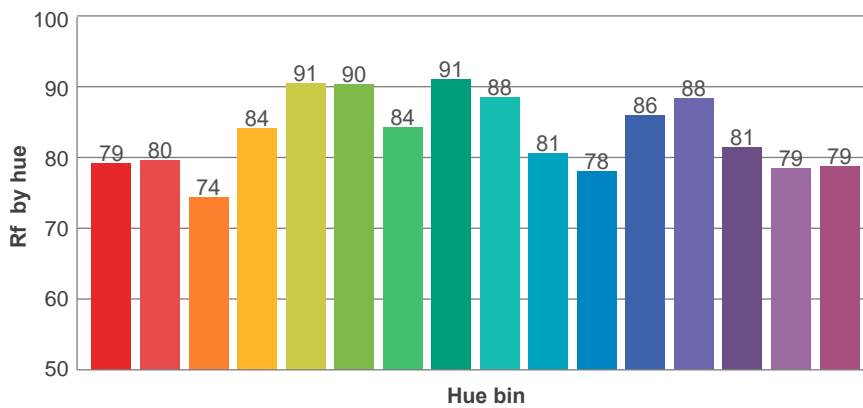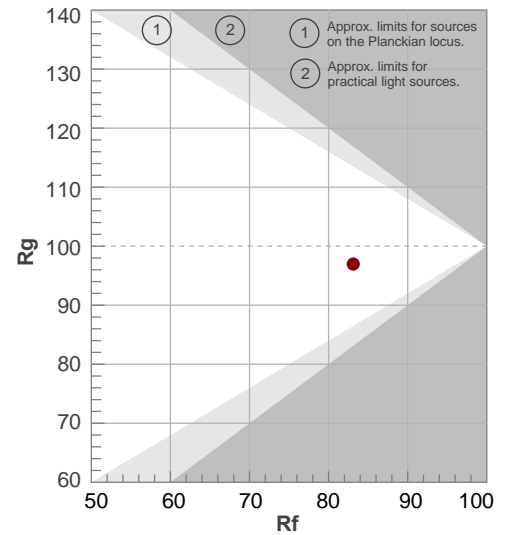

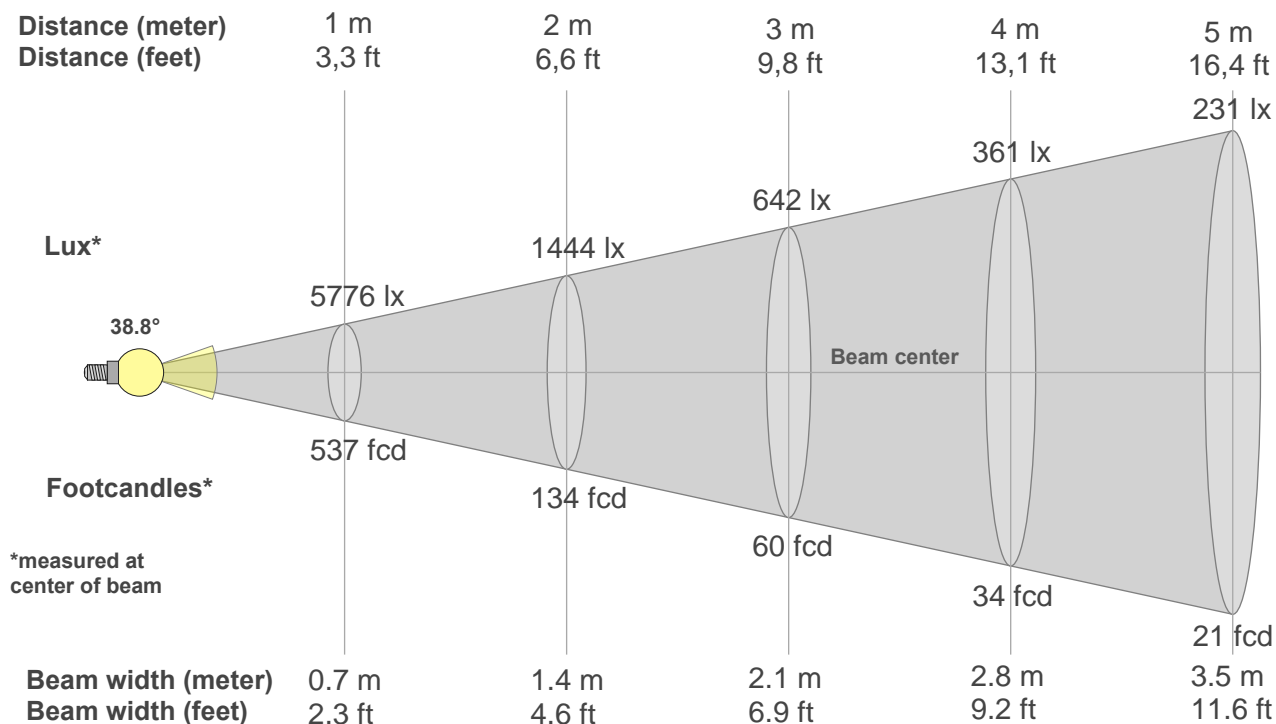

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
5776lx	1444lx	642lx	361lx	231lx	160lx	118lx	90lx	71lx	58lx	48lx	40lx	34lx	29lx	26lx	23lx	20lx	18lx	16lx	14lx
536.6fcd	134.1fcd	59.6fcd	33.5fcd	21.5fcd	14.9fcd	11fcd	8.4fcd	6.6fcd	5.4fcd	4.4fcd	3.7fcd	3.2fcd	2.7fcd	2.4fcd	2.1fcd	1.9fcd	1.7fcd	1.5fcd	1.3fcd

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
5776	5776	5656	5500	5284	4916	4549	4088	3606	3157	2774	2391	2116	1859	1628	1439	1250	1012	768	544
100%	100%	98%	95%	91%	85%	79%	71%	62%	55%	48%	41%	37%	32%	28%	25%	22%	18%	13%	9%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
5776	5776	5656	5500	5284	4916	4549	4088	3606	3157	2774	2391	2116	1859	1628	1439	1250	1012	768	544
100%	100%	98%	95%	91%	85%	79%	71%	62%	55%	48%	41%	37%	32%	28%	25%	22%	18%	13%	9%

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
5776	5776	5656	5500	5284	4916	4549	4088	3606	3157	2774	2391	2116	1859	1628	1439	1250	1012	768	544
100%	100%	98%	95%	91%	85%	79%	71%	62%	55%	48%	41%	37%	32%	28%	25%	22%	18%	13%	9%

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
5776	5776	5656	5500	5284	4916	4549	4088	3606	3157	2774	2391	2116	1859	1628	1439	1250	1012	768	544
100%	100%	98%	95%	91%	85%	79%	71%	62%	55%	48%	41%	37%	32%	28%	25%	22%	18%	13%	9%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
38.8°	75.3°	84.1°	99.4%	98.8%