


PROJECT INFORMATION		
JOB NAME		TYPE
ORDERING CODE		

NU3 LOPRO

3" Round Adjustable Warm Dim JA8




30°-35° BEAM (Note: Specifications are subject to change without notice)		
14mm DYNAMIC COB PERFORMANCE DATA		
LED LIGHT ENGINE	NOMINAL DELIVERED LUMENS	SYSTEM WATTAGE
20LM	1420LM @30K/97CRI	26W
Notes	Delivered lumens based on 35D optic with clear lens, (see page 2)	

15° - 30° BEAM (Note: Specifications are subject to change without notice)		
9mm DYNAMIC COB PERFORMANCE DATA		
LED LIGHT ENGINE	NOMINAL DELIVERED LUMENS	SYSTEM WATTAGE
10LM	670LM @30K/97CRI	13W
15LM	940LM @30K/97CRI	19W
Notes	Delivered lumens based on 30D optic with clear lens, (see page 2)	



Trim



Trimless



Trimless Millwork

FEATURES

- True 30° Tilt with <5% beam disruption (clipping)
- Zero ceiling line obstruction at Full Tilt
- Concentric Tilt Tracking ensures minimal light loss
- 1/16" micro flange
- 15° - 35° optical beam control
- UGR <5
- Multiple mounting, glare control options, trims, and finishes available

LED

- Luminus Dim-to-warm COB: 97 CRI; SDCM = 3-step MacAdam Ellipse; Lumen Maintenance: L₇₀ > 54,000 hrs
- Dim to Warm from 3000K - 1800K.

DIMMING AND CONTROLS

- 0-10V dimming to 1%
- Leading & trailing edge (Triac/ELV) dimming to 1%

LISTING

- ULus Listed to UL1598 & UL2108; cUL Listed to CSA C22.2 #250.0
- IP65 with lens - Suitable for wet locations with lens - Suitable for damp locations without lens
- Non-conductive, dead-front construction (Shower Approved)
- NSF/ANSI-2 Listed, with lens (Non-Food and Splash Zones)
- 5 Year Limited warranty


CONSTRUCTION

- Lexan™ (PC) highly resistant to impact and heat (240°F)
- Optimal material for wireless BLE signal connectivity
- Shatter proof acrylic bezel lens
- Electrocoated 16-gauge cold-rolled steel construction
- Accommodates ceiling thickness from 0.4" to 2.0"


ELECTRICAL

- 120V only Triac/ELV, 120V-277V
- Power factory ≥ 0.9
- 2kV driver input surge protection
- Remote emergency test switch
- 10W (T20 CEC) EM 90min battery
- Max. ambient installation temperature 95°F (35°C)


FIXTURE HEIGHT

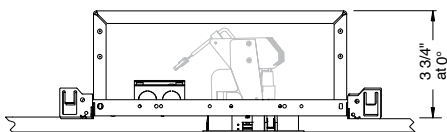


TRIMMED




ceiling cutout
3-3/8" diameter
ceiling thickness
0.4" to 1.25"




TRIMLESS




ceiling cutout
3-1/2" diameter
ceiling thickness
0.4" to 1.25"



MILLWORK



ceiling cutout
3-3/8" diameter
ceiling thickness
0.5" to 1.25"



alphabet

PROJECT INFORMATION		
JOB NAME		TYPE
ORDERING CODE		

15°- 35° BEAM ORDERING CODE

SERIES	NU3	NU3				
TYPE	RALP	round adjustable lopro				
	RATLP	round adjustable trimless lopro				
	RATMWLP	round adjustable trimless millwork lopro				
LED	WD	warm dim (Luminus)				
DELIVERED LUMENS	10LM ¹	670 lm				
	15LM ¹	940 lm				
	20LM ²	1420 lm				
Standard Configuration: 30D CL Calculated Delivered Lumens = [Delivered Lumen Value] x [Optic Multiplier] x [Lens Multiplier]						
CCT	3018	3000K, dim to 1800K	CCT at Light Level (%LF)			
			%LF	20LM	15LM	10LM
			100%	3000	3000	3000
			50%	3000	3000	2800
			25%	2800	2500	2300
10%	2200	2000	1900			
5%	1800	1800	1800			
CRI	97	97 CRI				
OPTIC & LM MULTIPLIER SEE PAGE 3	15D	15 degrees	(0.92)			
	25D	25 degrees	(0.96)			
	30D	30 degrees	(1.00)			
	35D	35 degrees	(0.97)			
TIR OPTIC ACCESSORY	NA	no accessory	(1.00)			
BEZEL LENS SEE PAGE 3	CL	clear lens	(1.00)			
	DL	diffused lens	(0.98)			
	HET	high efficiency textured lens, similar to Solite™	(1.00)			
	SBL	smoothing beam lens	(1.00)			
TRIM COLOR SEE PAGE 3	BK	black				
	WH	white				
	MC	matte chrome				
	BZ	bronze				
	WT	wheat				
Not applicable to trimless option. Do not include in trimless ordering code.						
BEZEL COLOR SEE PAGE 3	BK	black				
	WH	white				
	BZ	bronze				
	MC	matte chrome				
	WT	wheat				

15°- 35° BEAM ORDERING CODE

MOUNTING OPTIONS SEE PAGE 5	IC	insulation contact housing
	VOLTAGE	120 UNV 120V 120V-277V
DIMMING	DIM10 ELV1 ³	eldoLED flicker free 0-10V dimming to 1% leading & trailing edge (Triac/ELV) dimming to 1%
ELECTRICAL OPTIONS	EM10CA20	remote emergency battery backup, 90 minutes at 10W to LED, CA title 20

ADDITIONAL MOUNTING INFO

New Construction Bar Hangers (included)	Mounting Length: 14-3/4" to 26"
Extension Kit p/n: K20266 (ordered separately, 1 per fixture)	Extends a pair of Bar Hangers Total Mounting Length: 29" to 48"

YOUR COMPLETED ORDERING CODE

Follow the steps to specify your fixture, example:
NU3 - RALP - WD - 20LM - 3018 - 97 - 30D - NA - HET - WH - WH - IC - 120 - ELV1

NOTES

- 10LM/15LM available with 15D/25D/30D optics.
- 20LM available with 30D/35D optics.
- ELV1 available in 120V.

*Warm Dim CCT values at X% are for reference. Actual CCT may vary.

alphabet

PROJECT INFORMATION		
JOB NAME		TYPE
ORDERING CODE		

TRIM OPTIONS

TRIM/BEZEL COLORS



OPTICAL OPTIONS

- UGR calculation based on CIE 117-1995; room size: 4H X 8H, reflectance: 70/50/20;
- UGR calculation based on 15LM fixtures, unless otherwise noted.



OPTIC	BEAM ANGLE	UGR
15D	16.2	≤5
25D	23.2	≤5
30D	30.8	≤5



OPTIC	BEAM ANGLE	UGR
15D	36.8	14.7
25D	39.2	15.8
30D	42.6	16.6



OPTIC	BEAM ANGLE	UGR
15D	22	≤5
25D	26.4	6.7
30D	31.8	8



OPTIC	BEAM ANGLE	UGR
15D	18.2	≤5
25D	23.8	5.3
30D	31	5.6


GLARE CONTROL

CUT-OFF ANGLE

Visual comfort is achieved with a lower cut-off angle due to improved glare control. The smaller the cut-off angle, the easier it is on the eye.

Alphabet downlights have been thoughtfully engineered to eliminate glare while still delivering functional illumination.

- Cutoff angle of CL is 45.5 degrees;

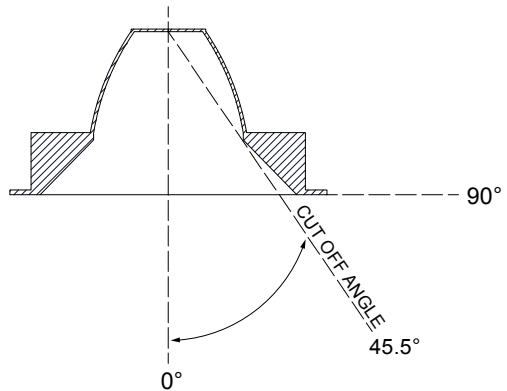

alphabet

PROJECT INFORMATION		
JOB NAME		TYPE
ORDERING CODE		

PHOTOMETRIC DATA

10LM

**15D
16° CLEAR LENS**

Throw Distance (ft)	Beam Diameter (ft)
6	1.7
8	2.3
10	2.9
12	3.4
14	4

137
77
49
34
25
Illuminance at Center (fc)

WATTS: 13.1	LPW: 47.4
LUMENS: 621	CCT: 3000K
INTENSITY	
DEGREE	CANDELA
0	4935
5	3758
15	905
25	101
35	10
45	2

**25D
23° CLEAR LENS**

Throw Distance (ft)	Beam Diameter (ft)
6	2.5
8	3.3
10	4.1
12	4.9
14	5.8

90
50
32
22
16
Illuminance at Center (fc)

WATTS: 13.1	LPW: 49.1
LUMENS: 644	CCT: 3000K
INTENSITY	
DEGREE	CANDELA
0	3228
5	2817
15	1050
25	175
35	22
45	3

**30D
31° CLEAR LENS**

Throw Distance (ft)	Beam Diameter (ft)
6	3.3
8	4.4
10	5.5
12	6.6
14	7.7

63.9
36
23
16
11.7
Illuminance at Center (fc)

WATTS: 13.1	LPW: 50.9
LUMENS: 666	CCT: 3000K
INTENSITY	
DEGREE	CANDELA
0	2301
5	2170
15	1192
25	261
35	19
45	3

20LM

**30D
28° CLEAR LENS**

Throw Distance (ft)	Beam Diameter (ft)
6	3
8	4
10	5
12	6
14	7

139
78
50
35
25
Illuminance at Center (fc)

WATTS: 25.3	LPW: 54.5
LUMENS: 1378	CCT: 3000K
INTENSITY	
DEGREE	CANDELA
0	4991
5	4548
15	2284
25	556
35	78.1
45	12

**35D
35° CLEAR LENS**

Throw Distance (ft)	Beam Diameter (ft)
6	3.8
8	5
10	6.3
12	7.6
14	8.8

105
59
38
26
19
Illuminance at Center (fc)

WATTS: 25.3	LPW: 56.1
LUMENS: 1420	CCT: 3000K
INTENSITY	
DEGREE	CANDELA
0	3777
5	3602
15	2305
25	785
35	94
45	12

alphabet


PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			

MOUNTING OPTIONS

RATINGS / CERTIFICATIONS	IC
TYPE IC	✓
SUITABLE FOR AIR HANDLING PLENUMS	✓
REDUCED AIRFLOW (WITH LENS) ASTM E283	✓

CEILING THICKNESS	
FIXTURE TYPE	MOUNTING TYPE
	STANDARD CEILING THICKNESS
TRIM	0.5" to 1.1"
TRIMLESS	0.5" to 1.1"
MILLWORK (TRIMLESS)	0.5" to 1.1"

IC - INSULATION CONTACT HOUSING

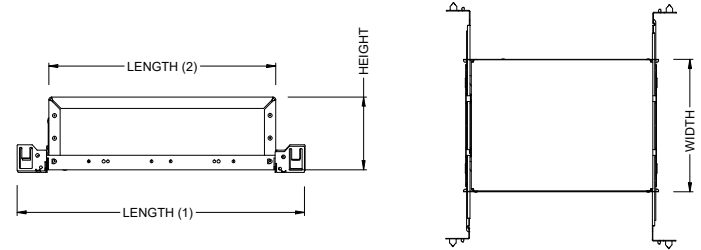

BOX SIZE	L 1	L 2	W	H
A	15 - 7/16"	11 - 3/4"	8 - 1/2"	3 - 3/4"

PROJECT INFORMATION		
JOB NAME		TYPE
ORDERING CODE		

BATTERY OPTIONS

EMERGENCY BATTERY

IOTA's ILB battery backups are UL Listed LED emergency drivers that allow the same LED fixture to be used for both normal and emergency operation. In the event of a power failure, the ILB switches to the emergency mode and operates the existing fixture for 90 minutes. The unit contains a battery, charger, and converter circuit in a single can. The constant power design of the ILB maintains the output wattage to the LED array even as the system voltage diminishes. UL 924 Listed for U.S. and Canada. UL 1310 Certified, output class 2 compliant. Includes single-piece TBTS test switch and charge indicator accessory kit. For use with switched and unswitched fixtures, and includes two-wire universal AC input. Meets or exceeds all National Electric Code and Life Safety Code Emergency Lighting requirements. Rated for use in plenum, damp location, recessed type IC, and enclosed and gasketed luminaires.

REMOTE TEST SWITCH


The remote test switch may be mounted adjacent to the LED Fixture by others.

EMERGENCY BATTERY ACCESS

Above ceiling access is recommended for ease of service, but LED fixture sizes of 4" and larger are capable of below ceiling access.

REMOTE LOCATION

Maximum remote mounting distance of the emergency driver shall be 50 feet. Remote location wiring provided by others. Follow all local and national electric/building codes.



Remote Test Switch

EM MODE OUTPUT (DELIVERED LUMENS)			
LUMEN ORDERING CODE	EM7	EM10	EM12
ALL OPTIONS (10LM TO 30LM)	400LM	580LM	720LM
Notes: Based on 30K, 97CRI			

IC - INSULATION CONTACT HOUSING WITH EM BATTERY (REMOTE TEST SWITCH)

