

Light efficiency:

95 Lumen/Watt

Light quality:

CRI: 82.2

Color temperature:

2958 K

Output: 3457 lm

Peak: 5323 cd


Power: 36.2 W

PF: 0.98



NU4-SD-SW-40LM-30K-80-30D-NA-AB-WH-WH

Date and time:
12/4/2024 12:56:45 PM

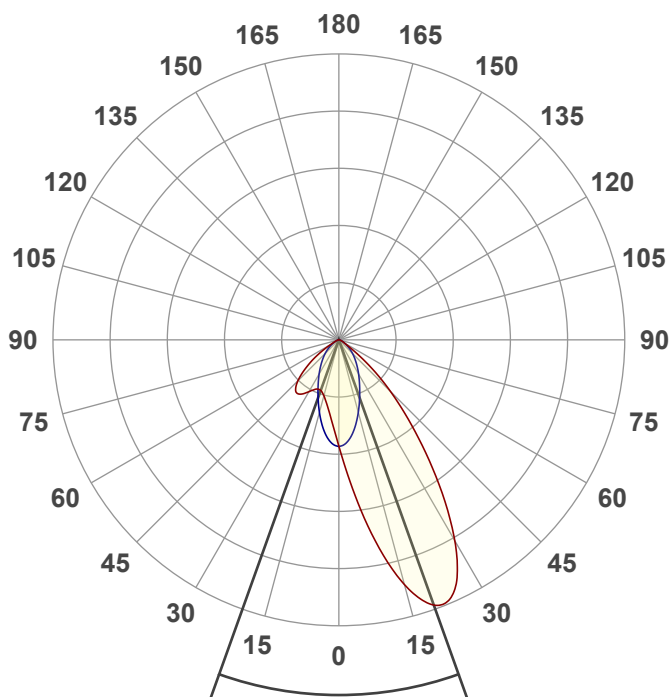


Beam angle

39.4°






CIE 1931
x: 0.443
y: 0.410

Spectra

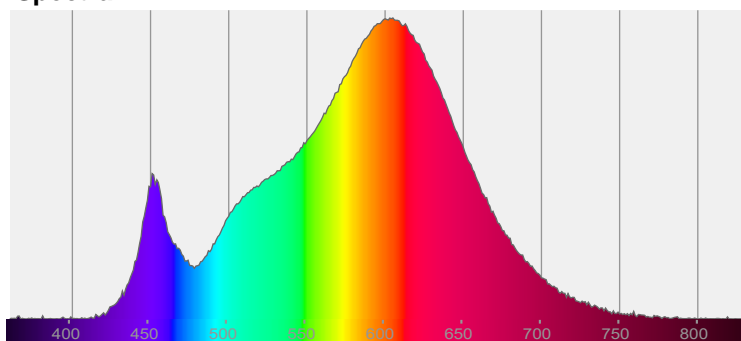


Power

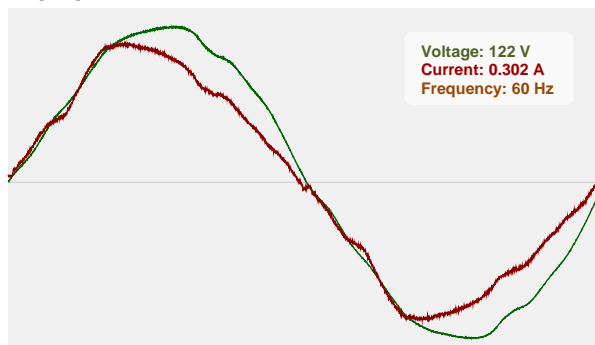


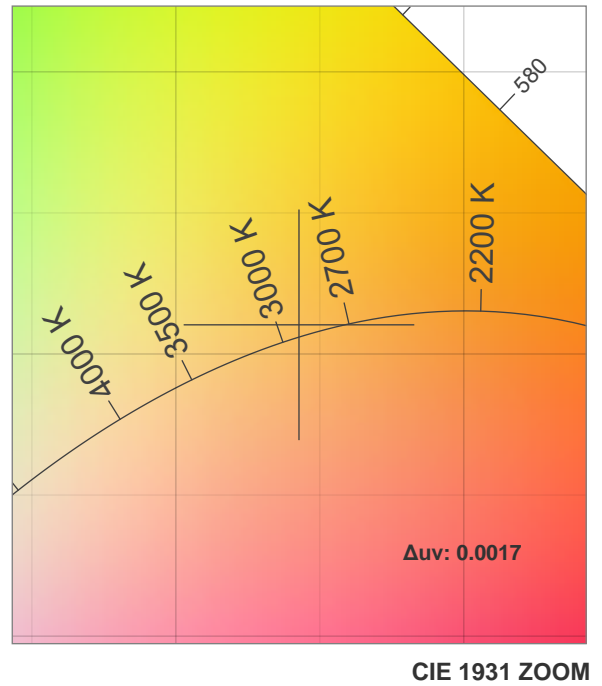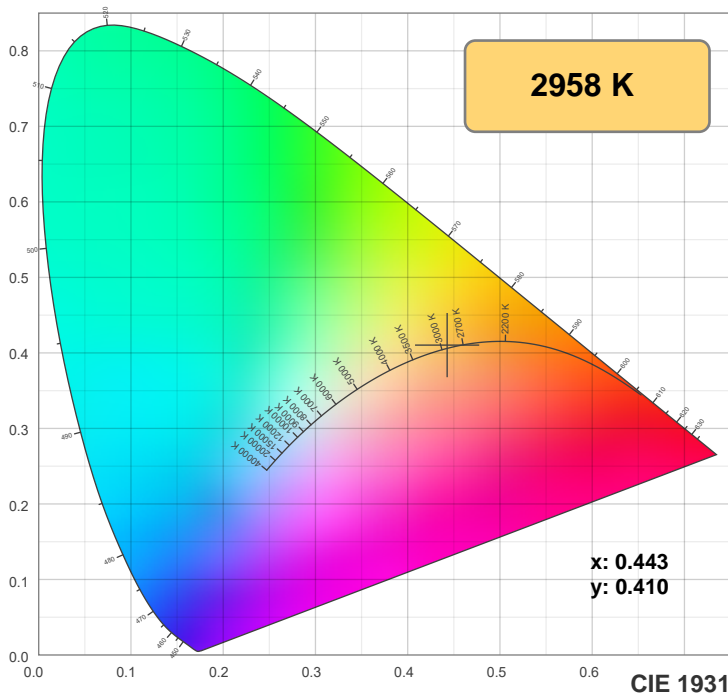

TM30: 85.4

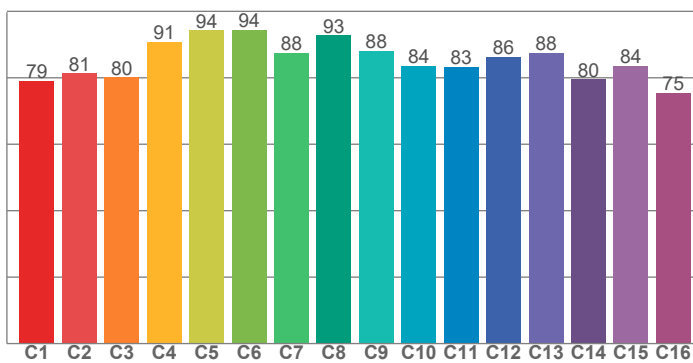

CRI: 82.2 (R1-R8)

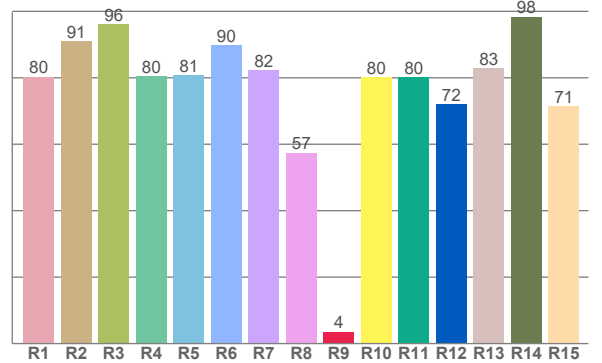

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
80.3	90.9	96.1	80.4	80.7	89.7	82.4	57.4	3.6	80.1	80.2	72.0	82.8	98.4	71.4


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
79.1	81.3	80.1	90.9	94.3	94.5	87.6	92.8	88.2	83.6	83.2	86.3	87.5	79.6	83.6	75.4

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
77.0	94.2	85.0	81.4	83.3	83.6	83.7	87.4	94.7	91.2	87.8	84.6	82.5	69.9	72.5

CQS: 82.4

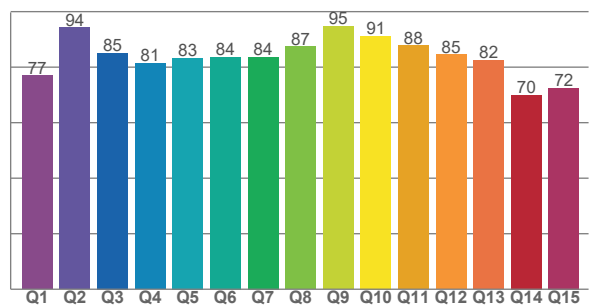

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
2958 K	82.2	3.6	85.4	94.4	82.4	0.443	0.410	0.252	0.350	0.0017







Rf 85.4


Fidelity index Rf

Rg 94.4

Gammut index Rg

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	79	-12%	0%
2	81	-8%	7%
3	80	-4%	10%
4	91	-1%	5%
5	94	1%	3%
6	94	1%	-2%
7	88	-5%	-5%
8	93	-4%	0%
9	88	-6%	4%
10	84	-4%	10%
11	83	0%	12%
12	86	6%	2%
13	88	4%	-8%
14	80	4%	-16%
15	84	-4%	-9%
16	75	-10%	-17%

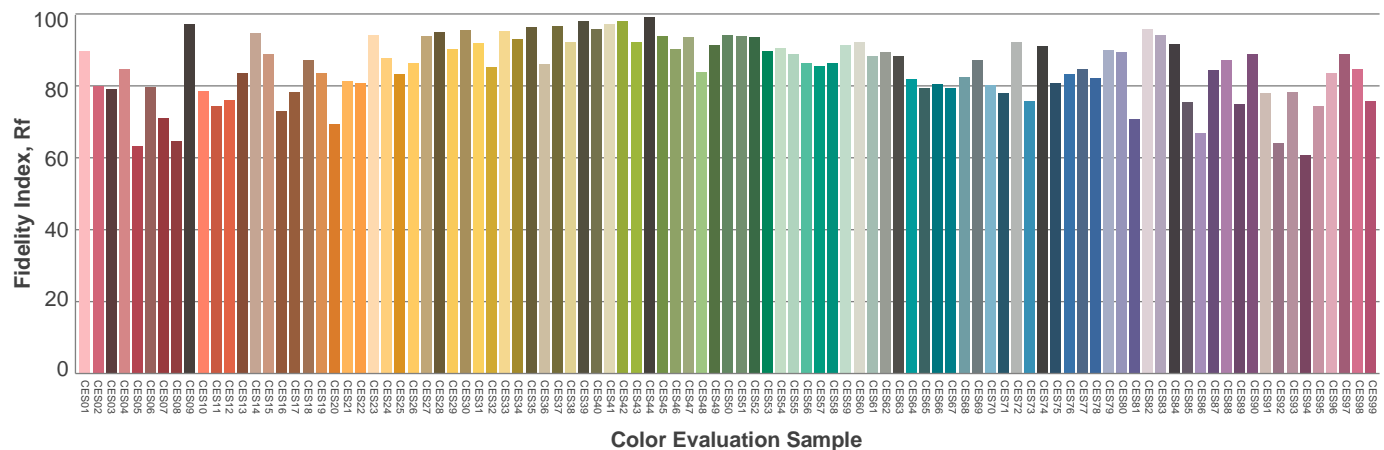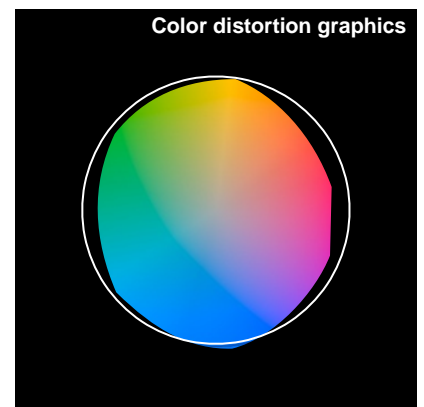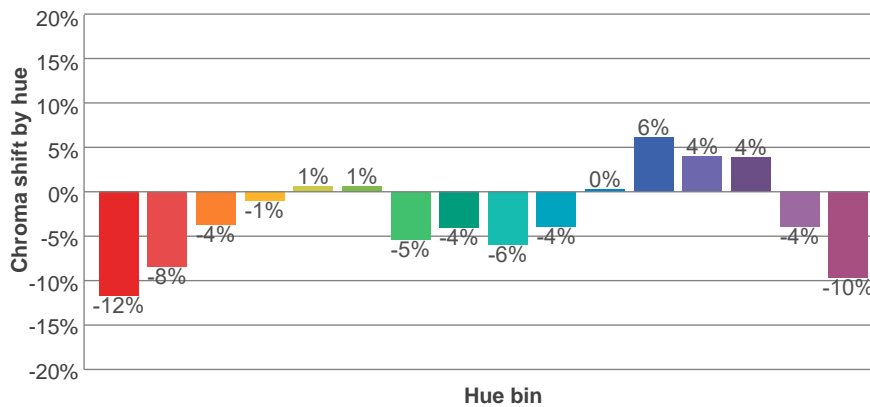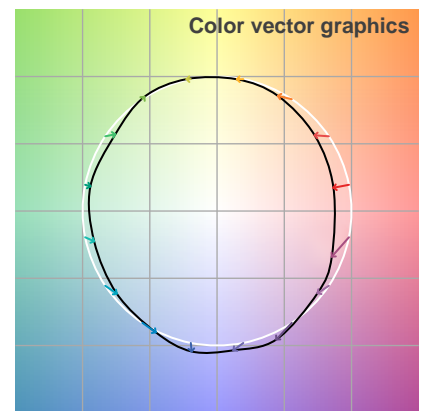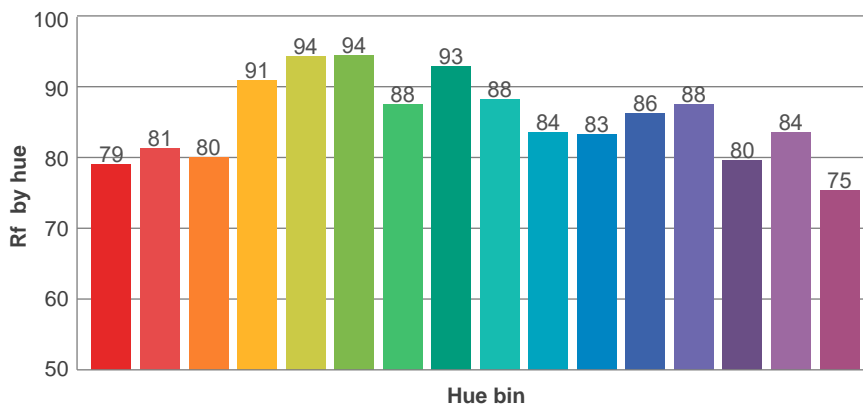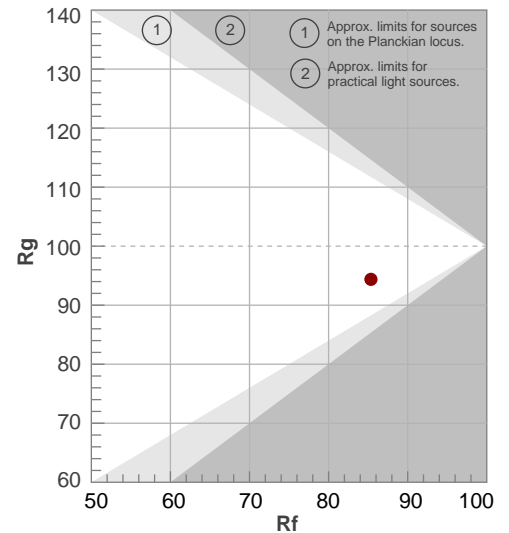

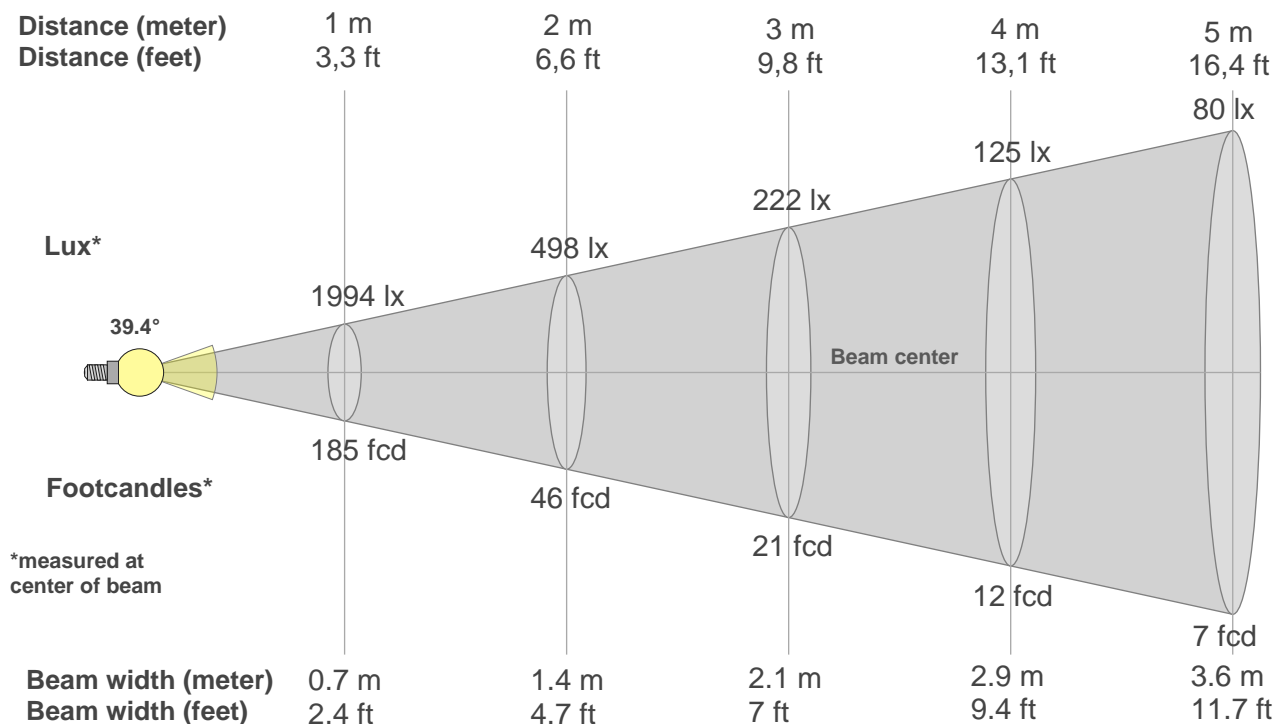

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
1994lx	498lx	222lx	125lx	80lx	55lx	41lx	31lx	25lx	20lx	16lx	14lx	12lx	10lx	9lx	8lx	7lx	6lx	6lx	5lx
185.2fcd	46.3fcd	20.6fcd	11.6fcd	7.4fcd	5.1fcd	3.8fcd	2.9fcd	2.3fcd	1.9fcd	1.5fcd	1.3fcd	1.1fcd	0.9fcd	0.8fcd	0.7fcd	0.6fcd	0.6fcd	0.5fcd	0.5fcd

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
1994	2753	3769	4742	5286	5141	4340	3231	2187	1371	717	273	124	82	52	35	22	8	1	0
100%	138%	189%	238%	265%	258%	218%	162%	110%	69%	36%	14%	6%	4%	3%	2%	1%	0%	0%	0%

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
1994	1908	1686	1407	1138	917	740	592	469	364	269	182	116	72	44	29	19	10	4	0
100%	96%	85%	71%	57%	46%	37%	30%	24%	18%	13%	9%	6%	4%	2%	1%	1%	0%	0%	0%

Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
1994	1529	1250	1085	1005	1020	1122	1240	1257	1083	783	460	190	87	50	31	20	10	1	0
100%	77%	63%	54%	50%	51%	56%	62%	63%	54%	39%	23%	10%	4%	3%	2%	1%	1%	0%	0%

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
1994	1908	1686	1407	1138	917	740	592	469	364	269	182	116	72	44	29	19	10	4	0
100%	96%	85%	71%	57%	46%	37%	30%	24%	18%	13%	9%	6%	4%	2%	1%	1%	0%	0%	0%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
39.4°	109.9°	132.1°	95.7%	78.7%