

Light efficiency:

56 Lumen/Watt

Light quality:

CRI: 93.1

Color temperature:

2954 K

Output: 1155 lm

Peak: 1906 cd


Power: 20.6 W

PF: 0.97



NUE4-RD-SW-20LM-30K-90-60D-HCL-WH-WH

Date and time:  
8/4/2023 1:16:19 PM

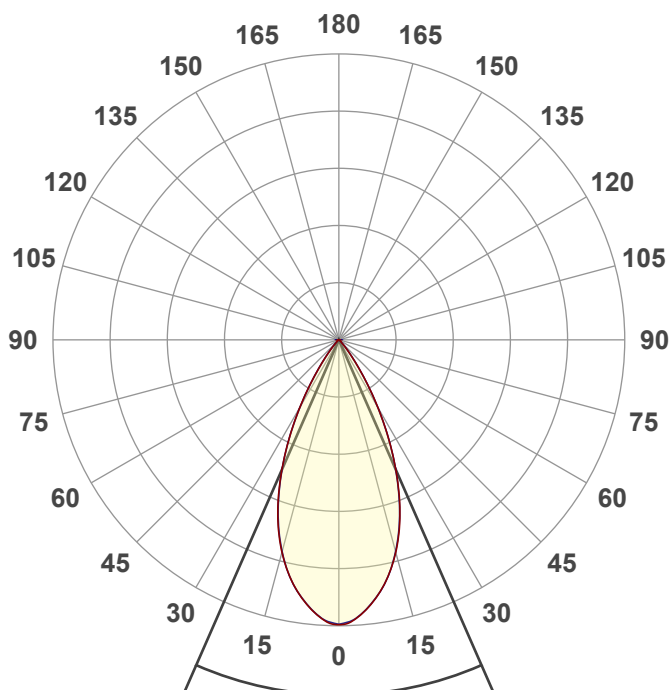


Beam angle

47.4°




CIE 1931  
x: 0.442  
y: 0.408



Spectra

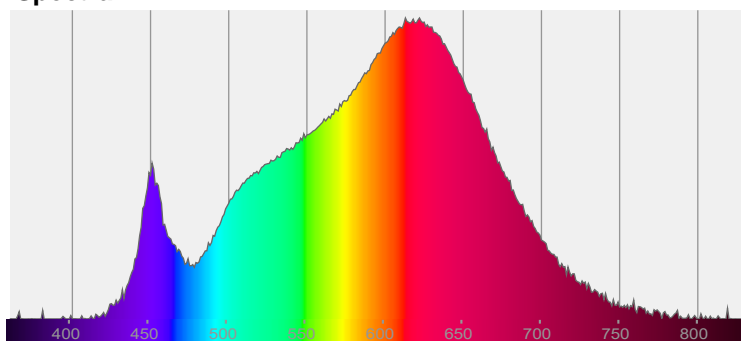


Power

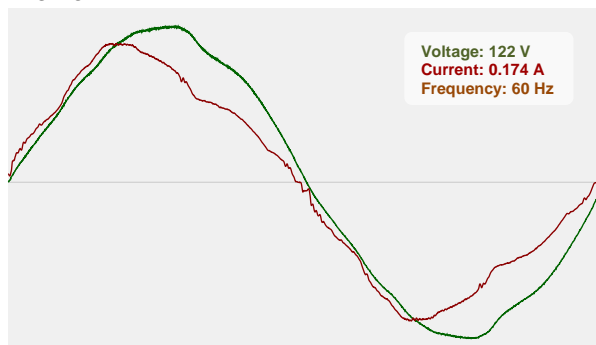


Voltage: 122 V  
Current: 0.174 A  
Frequency: 60 Hz

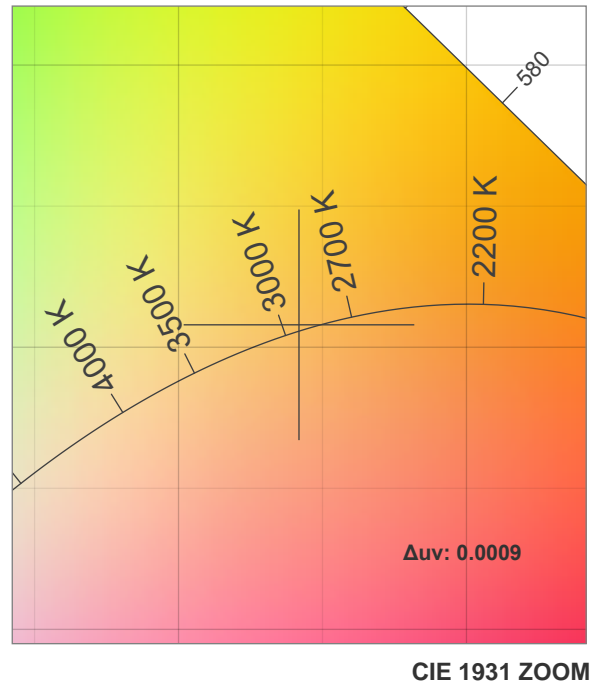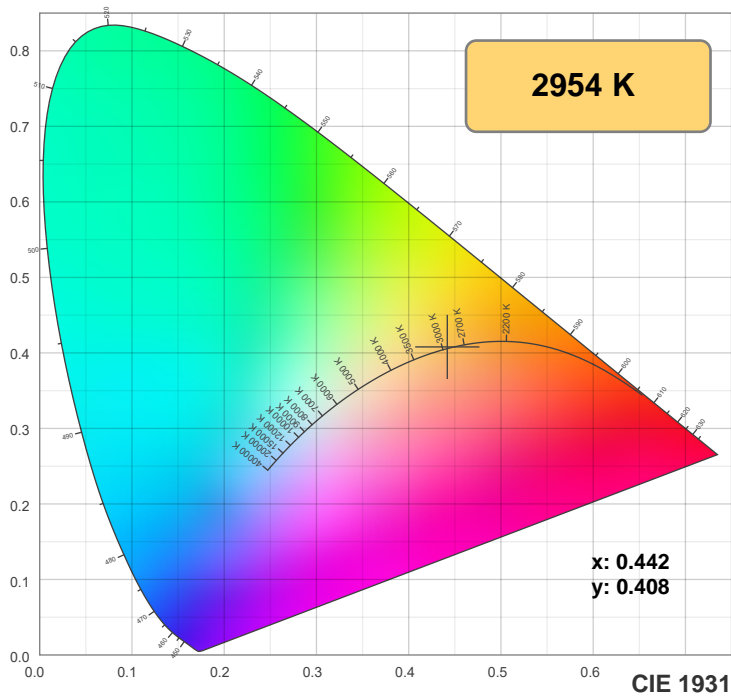

**TM30: 92.4**

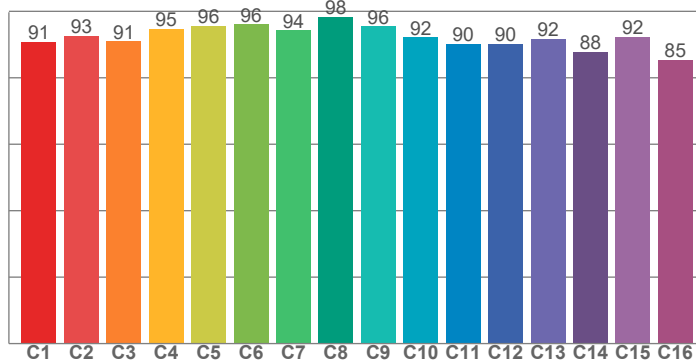

**CRI: 93.1 (R1-R8)**

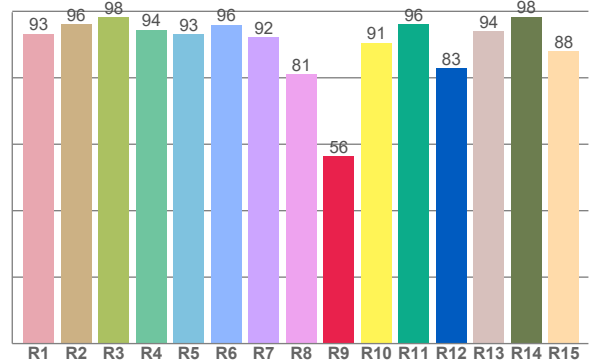

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
93.3	96.1	98.3	94.4	93.2	96.0	92.2	81.1	56.5	90.6	96.2	82.9	94.1	98.4	88.0


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
90.8	92.6	91.0	94.7	95.6	96.1	94.2	98.4	95.5	92.1	90.2	90.2	91.7	87.8	92.3	85.4

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
87.8	95.8	90.2	90.9	93.1	92.9	92.8	93.9	97.4	94.9	94.6	93.9	93.1	86.0	86.5

**CQS: 91.4**

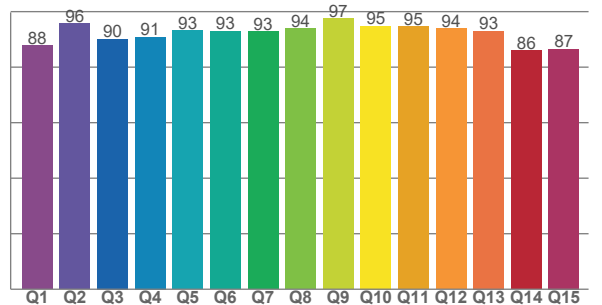

## Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
2954 K	93.1	56.5	92.4	99.2	91.4	0.442	0.408	0.252	0.349	0.0009







**Rf 92.4**


Fidelity index Rf

**Rg 99.2**

Gammut index Rg

Hue Bin	R <sub>f</sub>	Graphic shifts (%)	
		Chroma	Hue
1	91	-5%	0%
2	93	-3%	2%
3	91	-1%	4%
4	95	-1%	2%
5	96	0%	3%
6	96	2%	0%
7	94	-1%	-2%
8	98	0%	0%
9	96	-2%	2%
10	92	-1%	5%
11	90	1%	7%
12	90	5%	1%
13	92	3%	-5%
14	88	4%	-9%
15	92	-1%	-4%
16	85	-3%	-11%

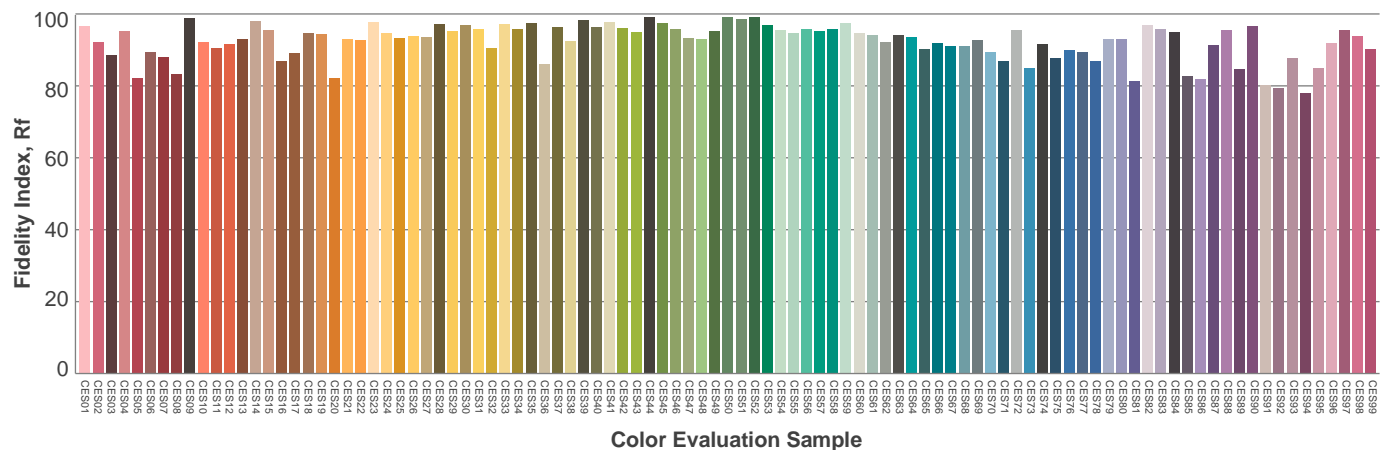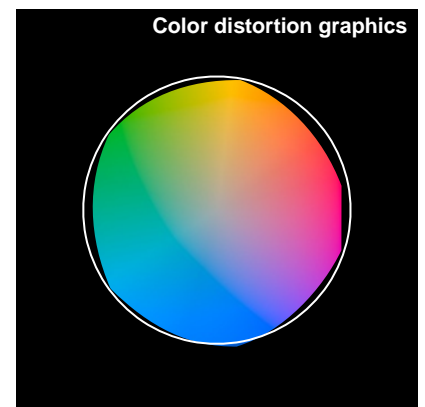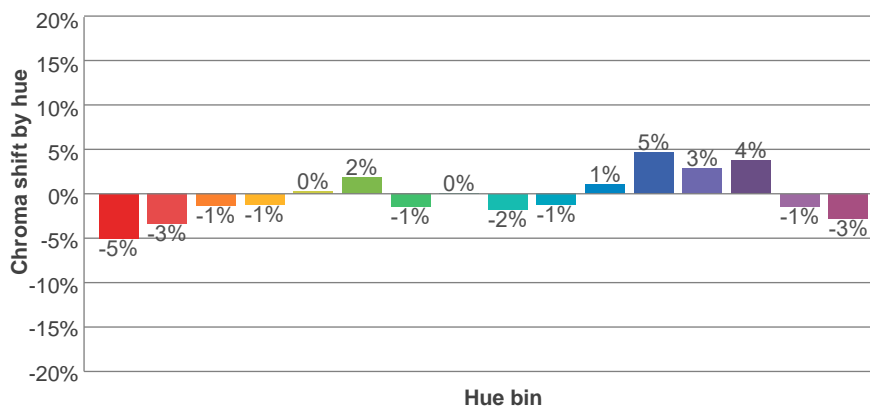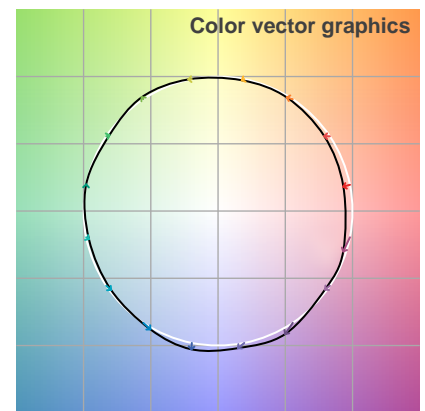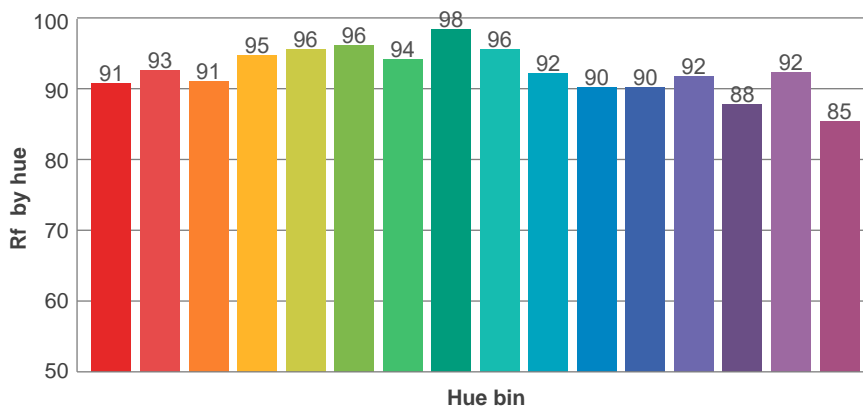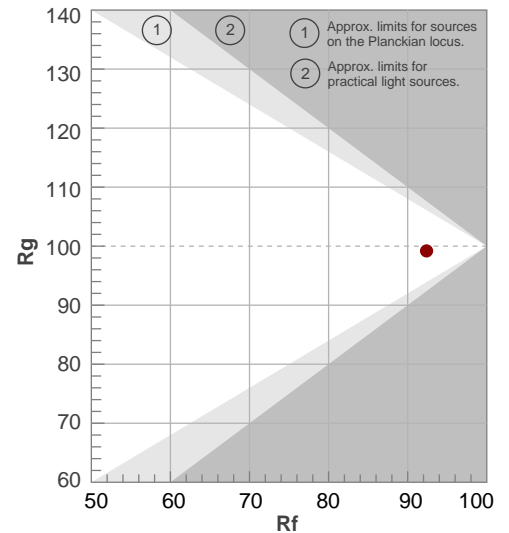

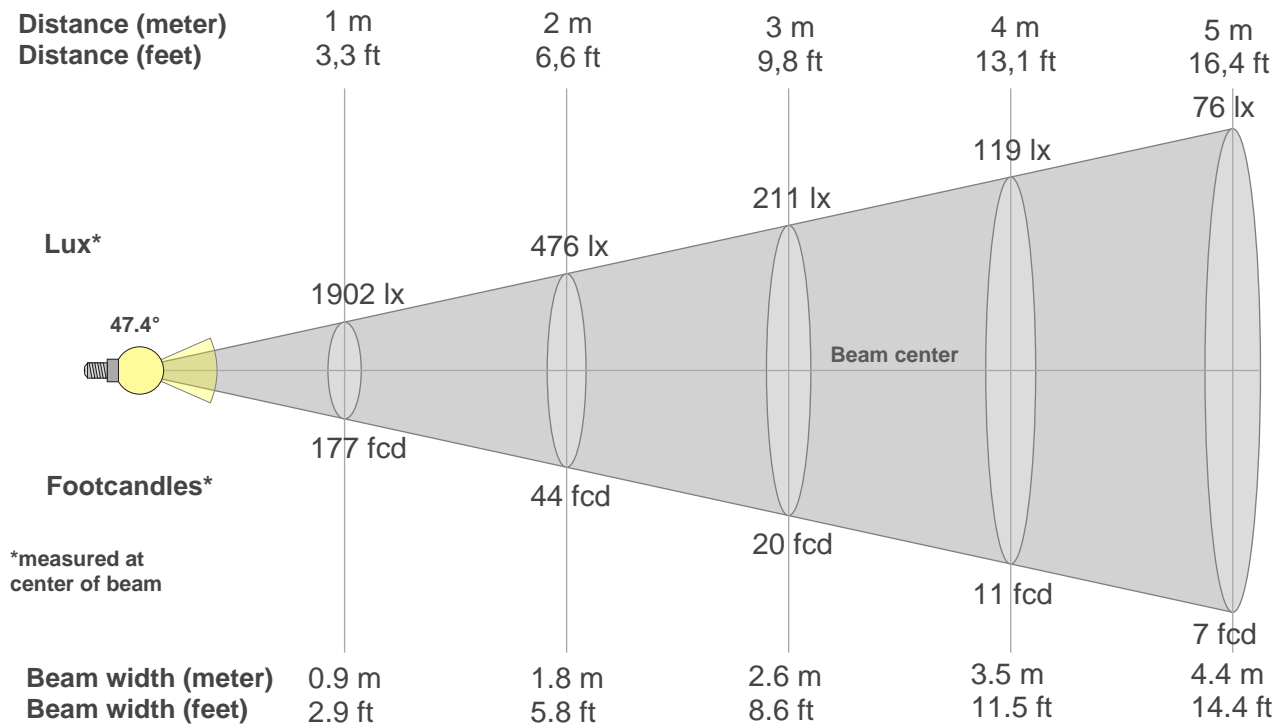

#### Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
1902lx	476lx	211lx	119lx	76lx	53lx	39lx	30lx	23lx	19lx	16lx	13lx	11lx	10lx	8lx	7lx	7lx	6lx	5lx	5lx
176.7fcd	44.2fcd	19.6fcd	11fcd	7.1fcd	4.9fcd	3.6fcd	2.8fcd	2.2fcd	1.8fcd	1.5fcd	1.2fcd	1fcd	0.9fcd	0.8fcd	0.7fcd	0.6fcd	0.5fcd	0.5fcd	0.4fcd

#### Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1902	1890	1855	1805	1746	1679	1602	1515	1419	1310	1191	1061	926	789	654	522	400	291	201	133
100%	99%	98%	95%	92%	88%	84%	80%	75%	69%	63%	56%	49%	42%	34%	27%	21%	15%	11%	7%

#### Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1902	1883	1851	1802	1745	1681	1602	1511	1412	1303	1184	1056	922	787	651	519	395	286	199	134
100%	99%	97%	95%	92%	88%	84%	79%	74%	68%	62%	55%	48%	41%	34%	27%	21%	15%	10%	7%

#### Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1902	1890	1855	1805	1746	1679	1602	1515	1419	1310	1191	1061	926	789	654	522	400	291	201	133
100%	99%	98%	95%	92%	88%	84%	80%	75%	69%	63%	56%	49%	42%	34%	27%	21%	15%	11%	7%

#### Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1902	1883	1851	1802	1745	1681	1602	1511	1412	1303	1184	1056	922	787	651	519	395	286	199	134
100%	99%	97%	95%	92%	88%	84%	79%	74%	68%	62%	55%	48%	41%	34%	27%	21%	15%	10%	7%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
47.4°	72.6°	84.7°	99.4%	98.8%