

Light efficiency:

96 Lumen/Watt

Light quality:

CRI: 92.0

Color temperature:


3021 K

Output: 1525 lm

Peak: 957 cd


Power: 15.9 W

PF: 0.96



NU3-QD-SW-20LM-30K-90-WH80-WH-WH

Date and time:
9/23/2022 2:12:27 PM

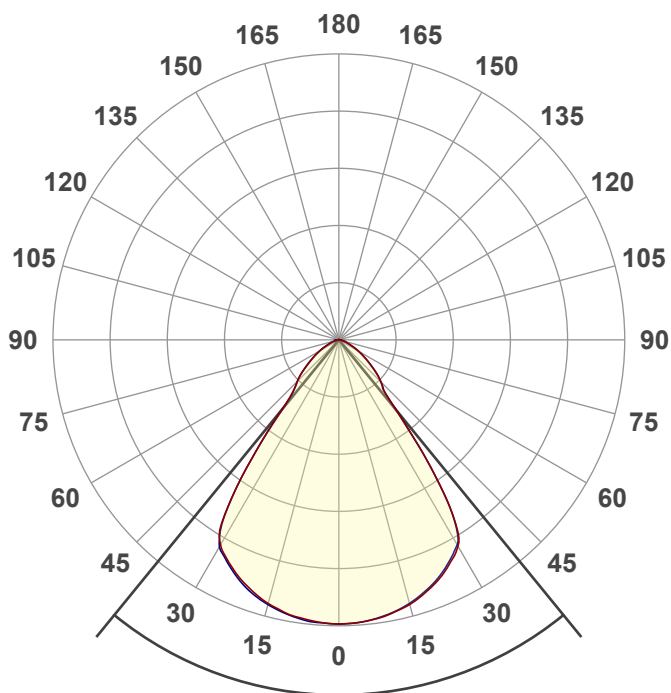


Beam angle

78.4°






CIE 1931
x: 0.437
y: 0.406

Spectra

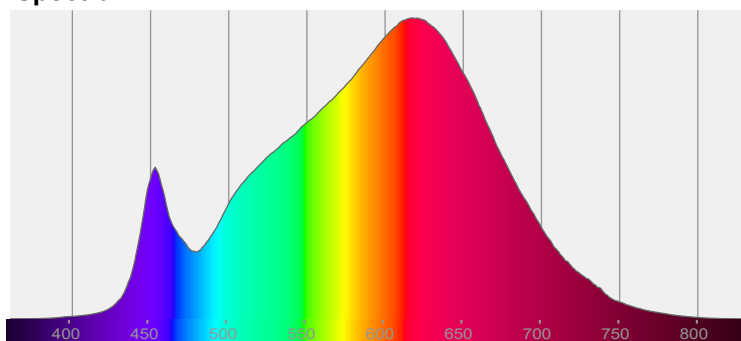


Power

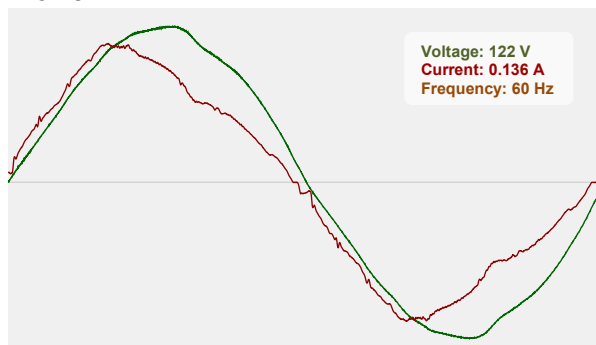


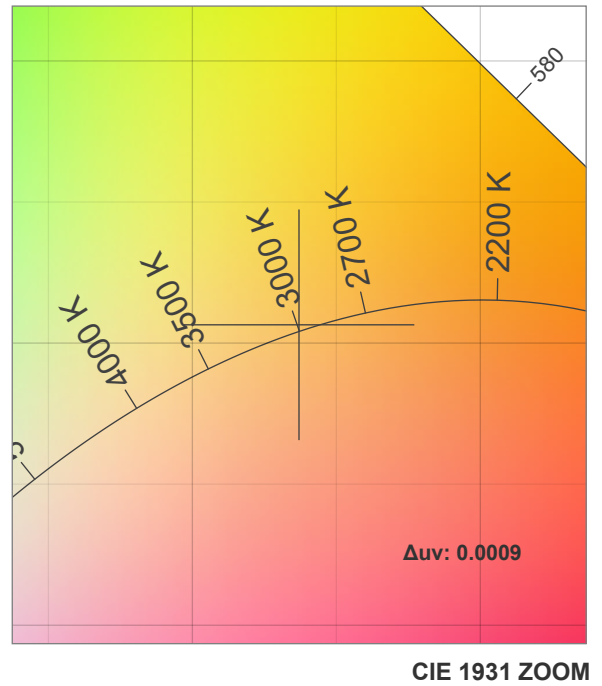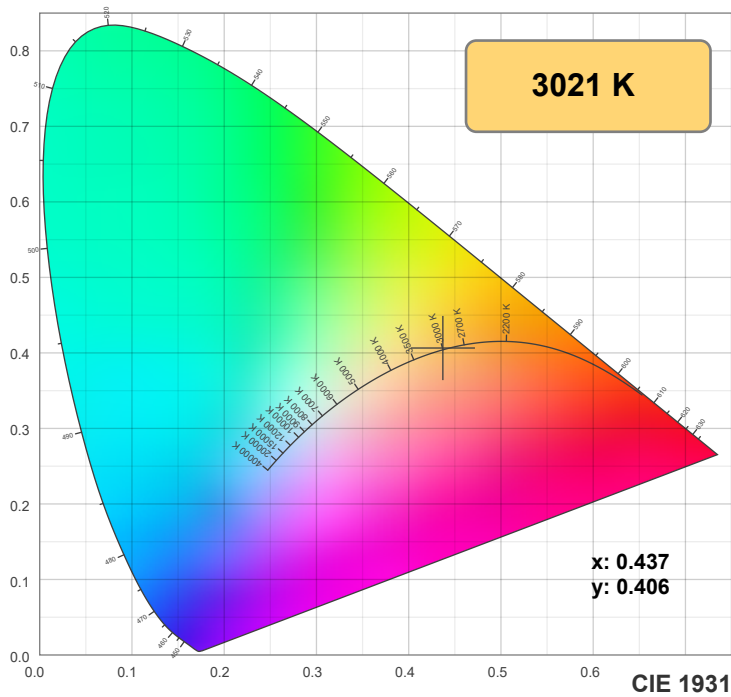

TM30: 91.4

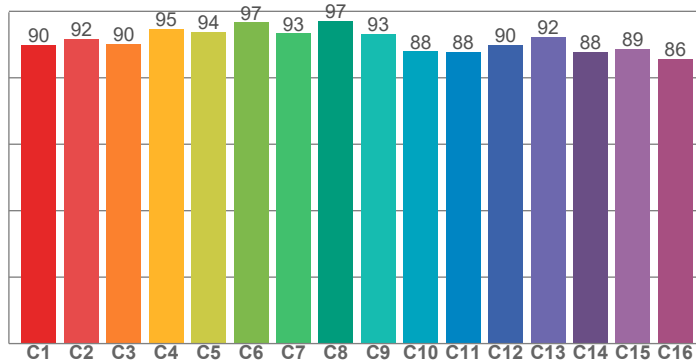

CRI: 92.0 (R1-R8)

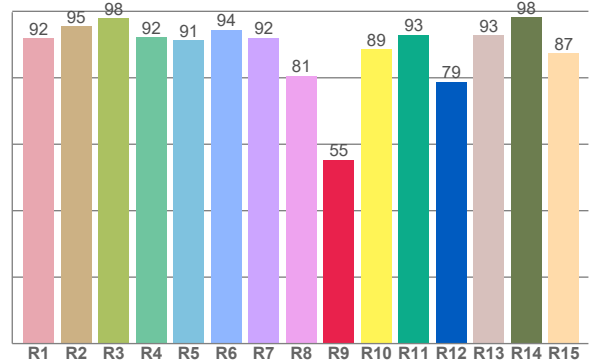

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
91.9	95.5	97.9	92.3	91.4	94.4	92.1	80.7	55.4	88.6	93.0	78.8	92.8	98.2	87.3


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
89.9	91.7	90.2	94.8	93.8	96.7	93.3	97.1	93.2	88.0	87.8	89.9	92.2	87.7	88.7	85.7

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
88.0	95.9	88.6	87.9	90.7	91.6	91.8	93.1	97.5	94.2	93.4	92.7	92.1	85.7	86.5

CQS: 90.6

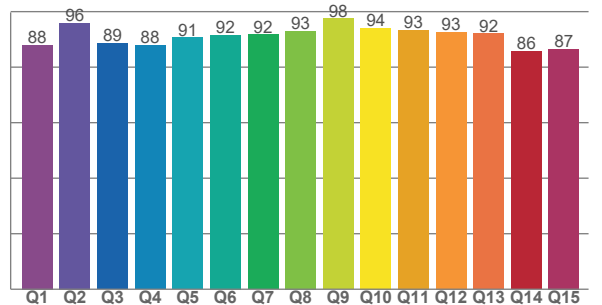

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3021 K	92.0	55.4	91.4	98.4	90.6	0.437	0.406	0.250	0.348	0.0009







Rf 91.4


Fidelity index Rf

Rg 98.4

Gammut index Rg

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	90	-5%	0%
2	92	-4%	3%
3	90	-2%	5%
4	95	-1%	2%
5	94	-2%	2%
6	97	1%	0%
7	93	-3%	-1%
8	97	-1%	0%
9	93	-3%	4%
10	88	-2%	7%
11	88	2%	9%
12	90	5%	2%
13	92	3%	-5%
14	88	4%	-9%
15	89	-1%	-7%
16	86	-2%	-11%

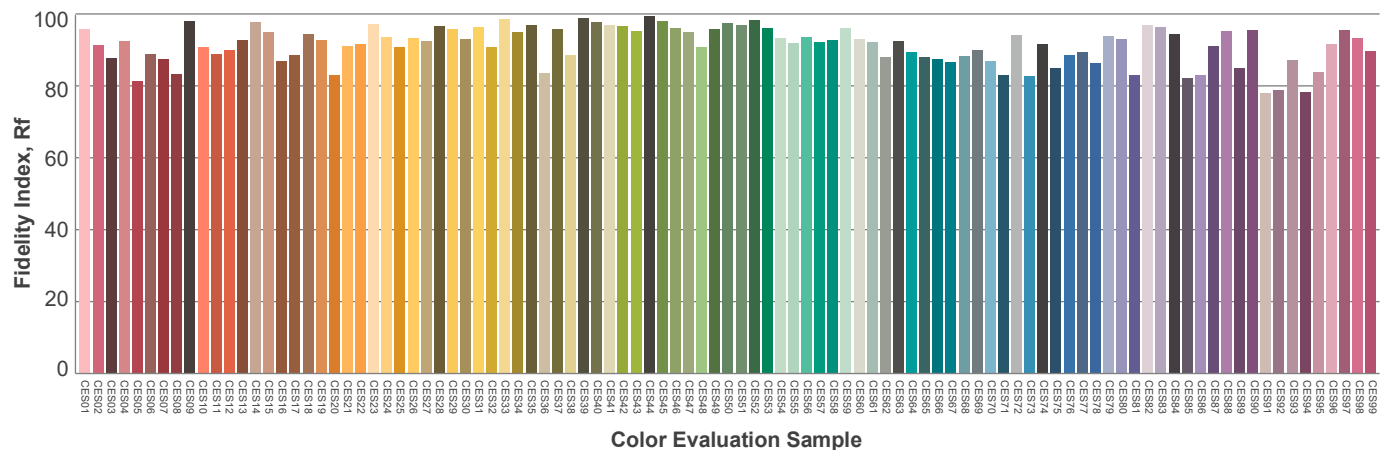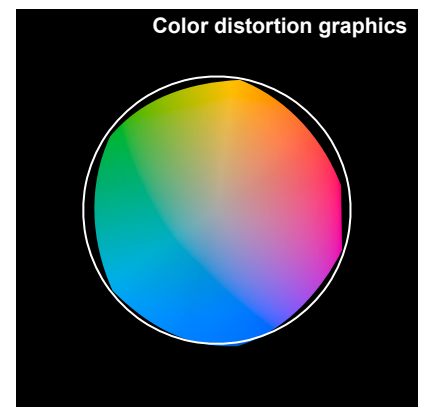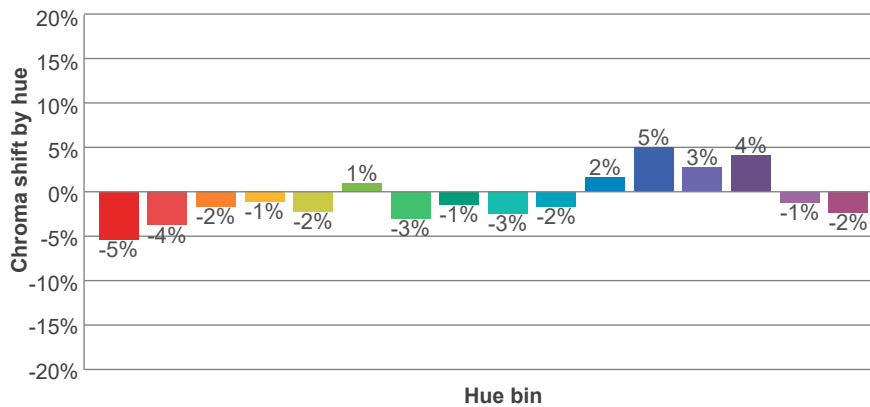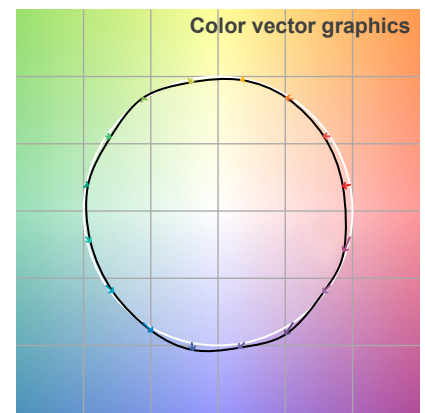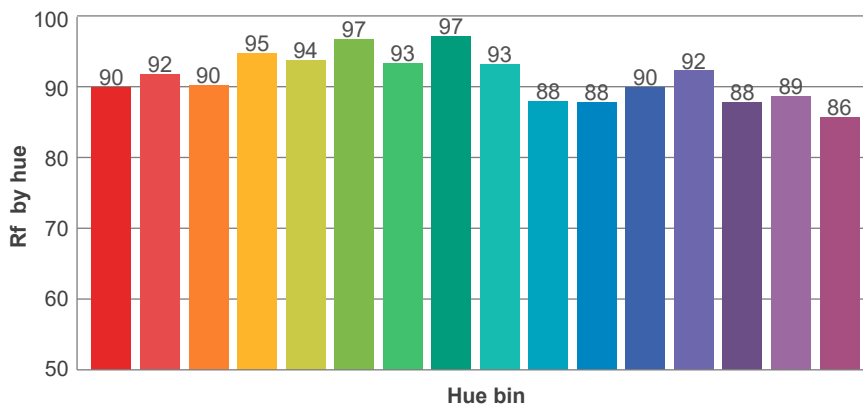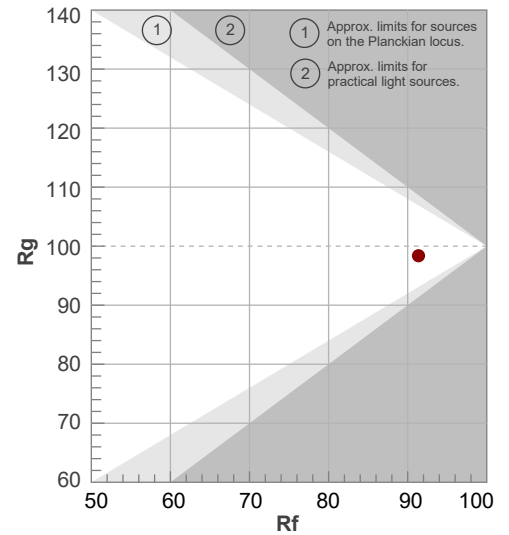

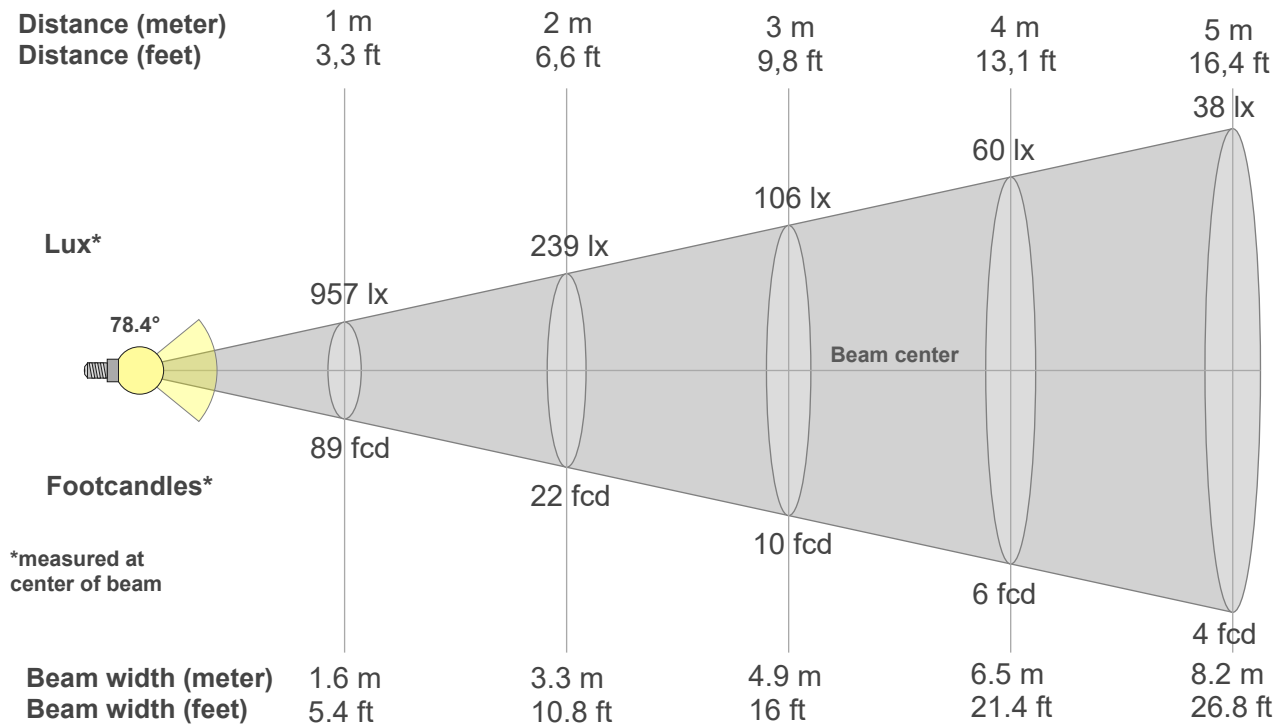

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
957lx	239lx	106lx	60lx	38lx	27lx	20lx	15lx	12lx	10lx	8lx	7lx	6lx	5lx	4lx	4lx	3lx	3lx	3lx	2lx
88.9fcd	22.2fcd	9.9fcd	5.6fcd	3.6fcd	2.5fcd	1.8fcd	1.4fcd	1.1fcd	0.9fcd	0.7fcd	0.6fcd	0.5fcd	0.5fcd	0.4fcd	0.3fcd	0.3fcd	0.3fcd	0.2fcd	0.2fcd

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
957	953	942	922	892	854	798	584	280	200	155	112	77	49	30	17	6	1	1	0
100%	100%	98%	96%	93%	89%	83%	61%	29%	21%	16%	12%	8%	5%	3%	2%	1%	0%	0%	0%

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
957	952	939	918	888	847	792	580	281	200	152	110	76	47	29	16	7	1	1	0
100%	100%	98%	96%	93%	89%	83%	61%	29%	21%	16%	11%	8%	5%	3%	2%	1%	0%	0%	0%

Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
957	951	941	919	887	848	796	586	272	198	150	107	74	46	27	15	5	1	0	0
100%	99%	98%	96%	93%	89%	83%	61%	28%	21%	16%	11%	8%	5%	3%	2%	1%	0%	0%	0%

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
957	954	942	923	895	853	802	585	264	197	151	108	75	47	29	15	6	1	0	0
100%	100%	99%	96%	94%	89%	84%	61%	28%	21%	16%	11%	8%	5%	3%	2%	1%	0%	0%	0%

Beam angle 50°	Field angle 10°	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
78.4°	115.4°	143.8°	95.4%	83.2%