

Light efficiency:

68 Lumen/Watt

Light quality:

CRI: 92.7

Color temperature:

2287 K

Output: 2304 lm

Peak: 9402 cd


Power: 34.0 W

PF: 0.98




NU3-RD-SW-25LM-22K-90-20D-NL-WH-WH

Date and time:
11/20/2024 1:22:56 PM

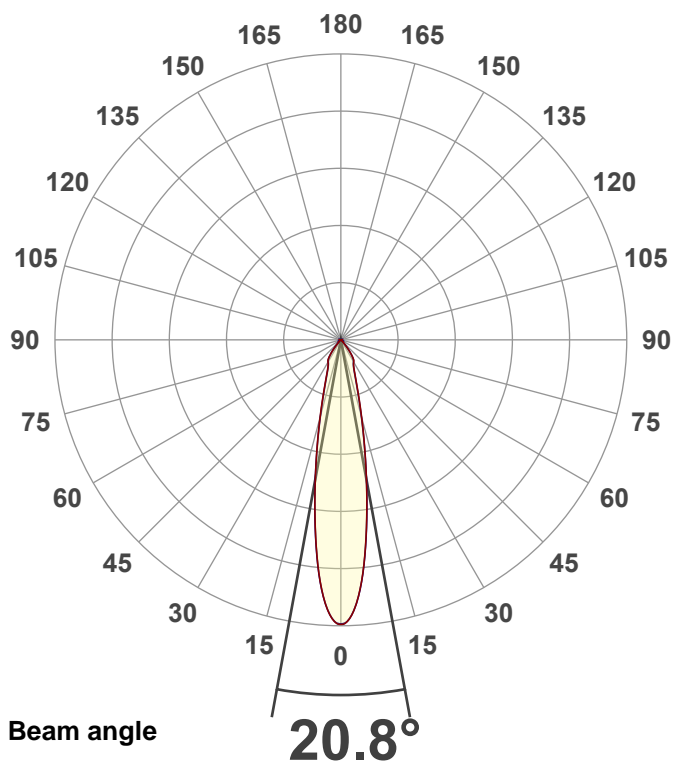




CIE 1931
x: 0.498
y: 0.417

Spectra

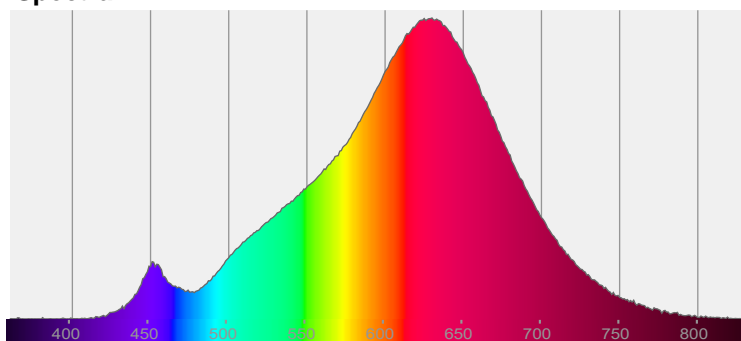


Power

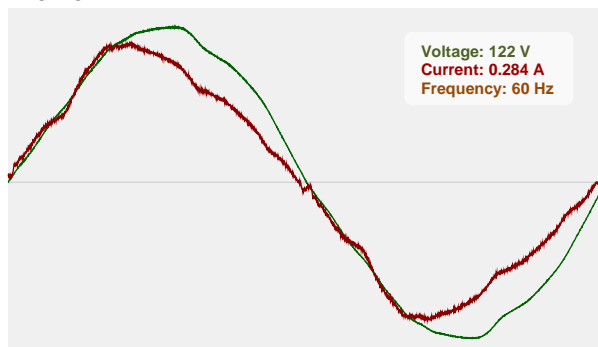


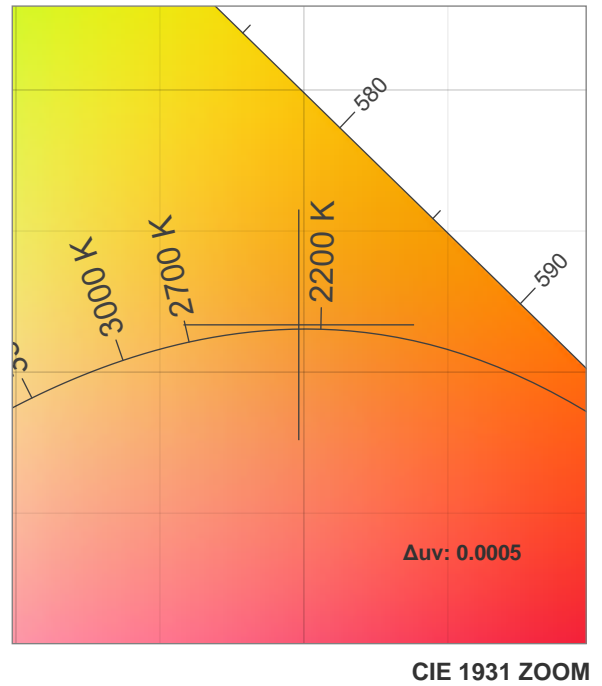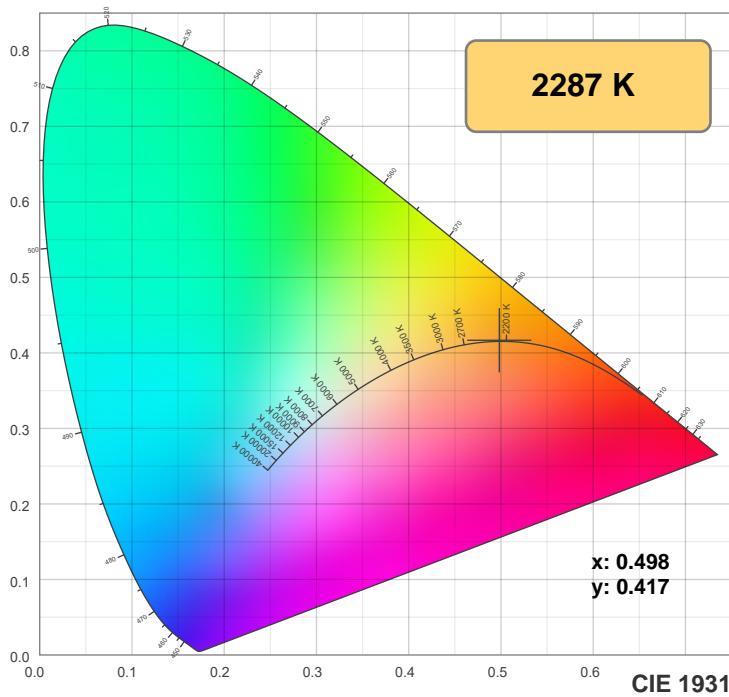

TM30: 92.3

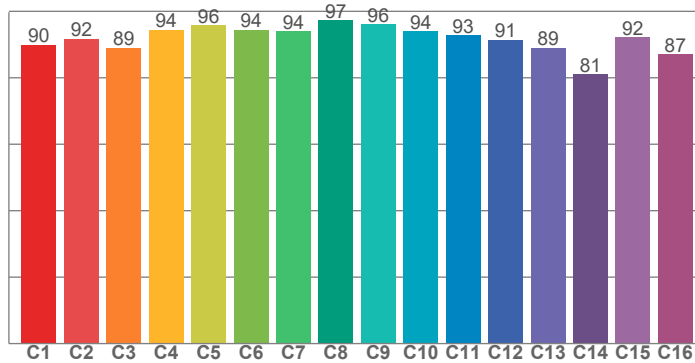

CRI: 92.7 (R1-R8)

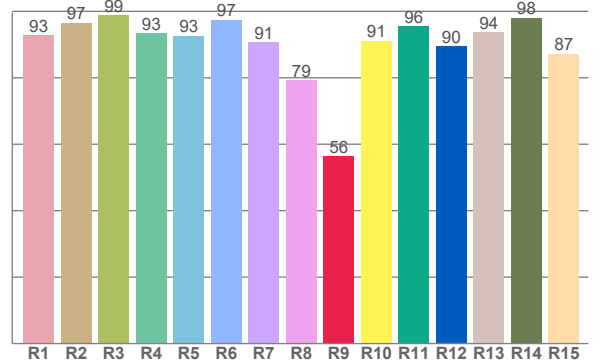

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
92.7	96.5	98.8	93.4	92.7	97.5	90.6	79.2	56.5	91.1	95.5	89.5	93.8	98.1	87.2


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
90.0	91.7	89.0	94.3	95.8	94.4	94.0	97.2	96.1	94.0	92.8	91.4	89.0	81.0	92.1	87.1

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
82.7	90.1	88.0	88.2	88.5	87.3	87.2	88.5	92.6	90.7	90.2	89.5	88.7	82.2	82.2

CQS: 87.0

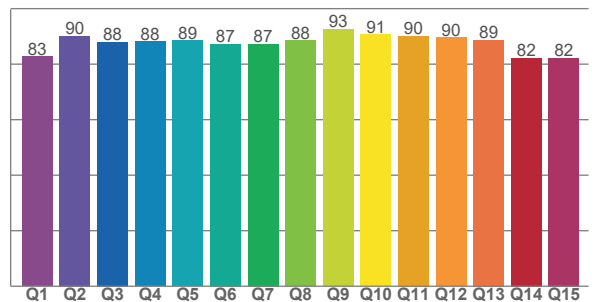

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
2287 K	92.7	56.5	92.3	99.9	87.0	0.498	0.417	0.285	0.357	0.0005







Rf 92.3


Fidelity index Rf

Rg 99.9

Gamut index Rg

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	90	-5%	0%
2	92	-4%	3%
3	89	-1%	5%
4	94	0%	3%
5	96	2%	3%
6	94	4%	1%
7	94	0%	-4%
8	97	0%	-2%
9	96	-2%	0%
10	94	-2%	2%
11	93	1%	4%
12	91	3%	1%
13	89	4%	-10%
14	81	2%	-15%
15	92	0%	-5%
16	87	-4%	-9%

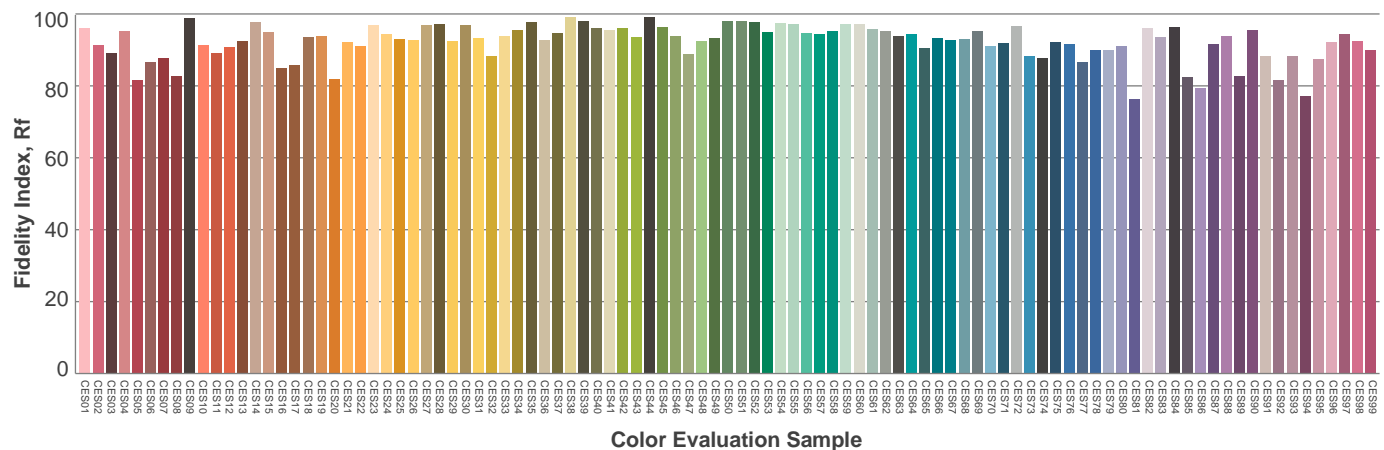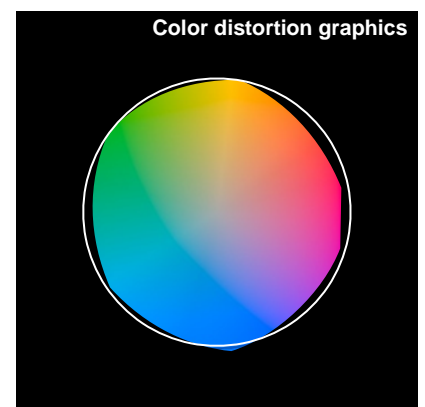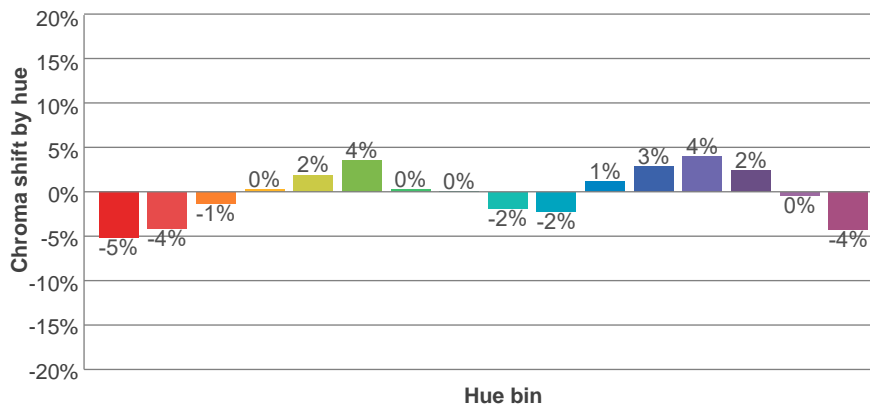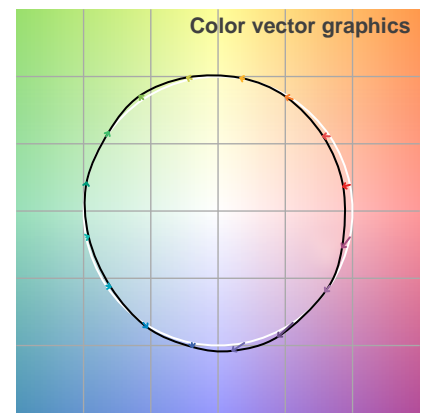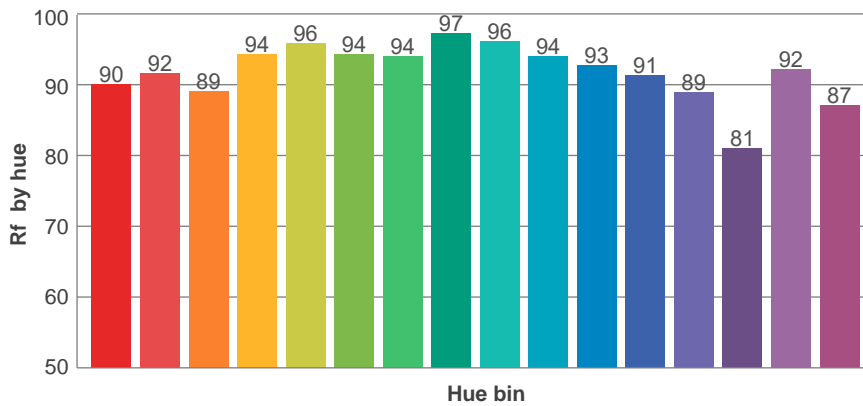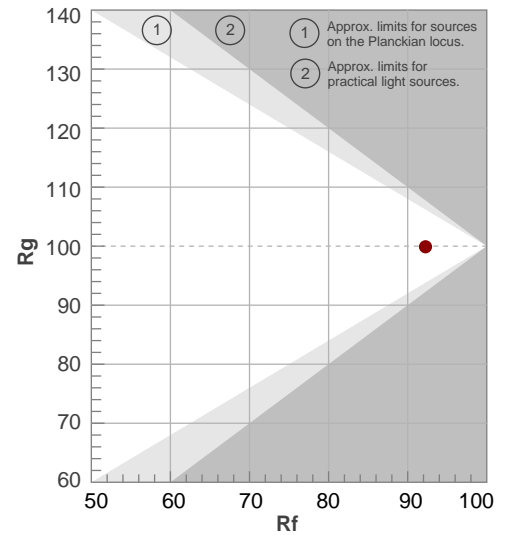

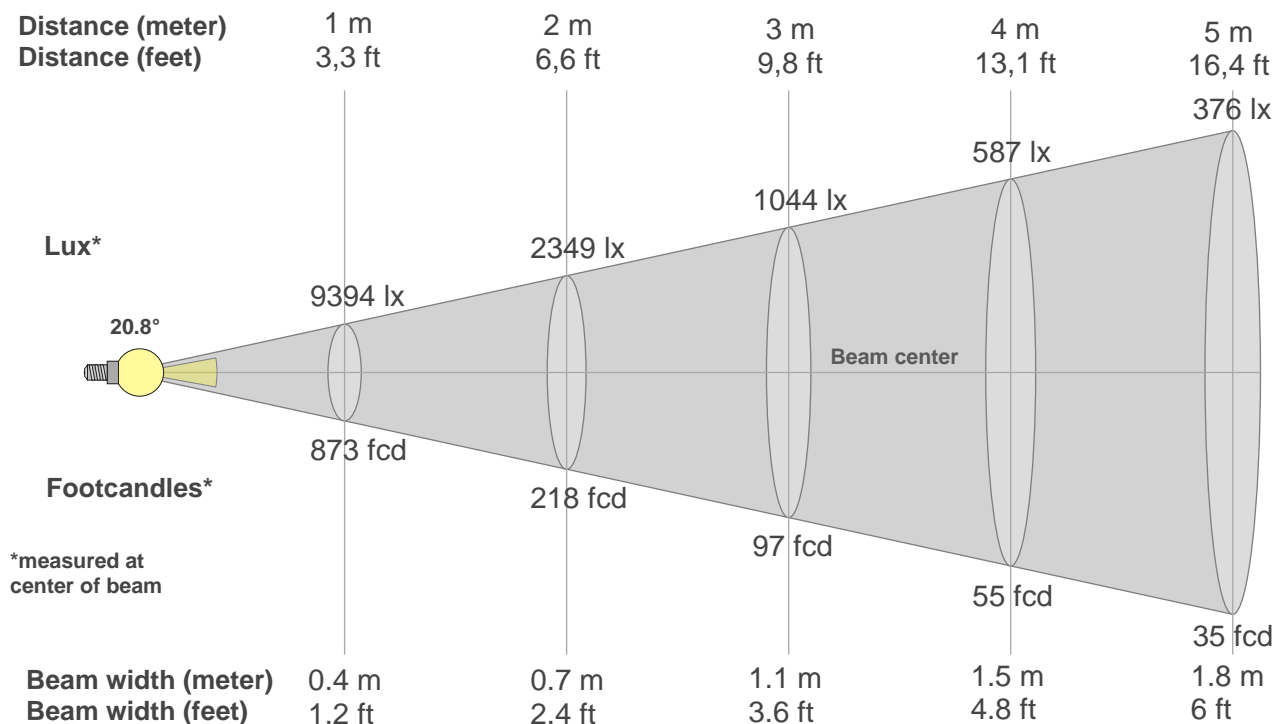

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
9394lx	2349lx	1044lx	587lx	376lx	261lx	192lx	147lx	116lx	94lx	78lx	65lx	56lx	48lx	42lx	37lx	33lx	29lx	26lx	23lx
872.8fcd	218.2fcd	97fcd	54.5fcd	34.9fcd	24.2fcd	17.8fcd	13.6fcd	10.8fcd	8.7fcd	7.2fcd	6.1fcd	5.2fcd	4.5fcd	3.9fcd	3.4fcd	3fcd	2.7fcd	2.4fcd	2.2fcd

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
9394	9150	8442	7365	6105	4901	3856	3009	2348	1856	1505	1257	1080	967	895	848	804	705	564	407
100%	97%	90%	78%	65%	52%	41%	32%	25%	20%	16%	13%	12%	10%	10%	9%	9%	8%	6%	4%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
9394	9155	8452	7381	6122	4907	3837	2972	2302	1811	1464	1221	1054	947	878	832	785	689	552	399
100%	97%	90%	79%	65%	52%	41%	32%	25%	19%	16%	13%	11%	10%	9%	9%	8%	7%	6%	4%

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
9394	9150	8442	7365	6105	4901	3856	3009	2348	1856	1505	1257	1080	967	895	848	804	705	564	407
100%	97%	90%	78%	65%	52%	41%	32%	25%	20%	16%	13%	12%	10%	10%	9%	9%	8%	6%	4%

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
9394	9155	8452	7381	6122	4907	3837	2972	2302	1811	1464	1221	1054	947	878	832	785	689	552	399
100%	97%	90%	79%	65%	52%	41%	32%	25%	19%	16%	13%	11%	10%	9%	9%	8%	7%	6%	4%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
20.8°	52.7°	80.4°	99.8%	99.6%